





FAG


X-life

24138-BE-XL-K30-C2

Spherical Roller Bearing

Spherical roller bearings 241...-BE-K30, main dimensions to DIN 635-2, with tapered bore, taper 1:30

Informacje techniczne

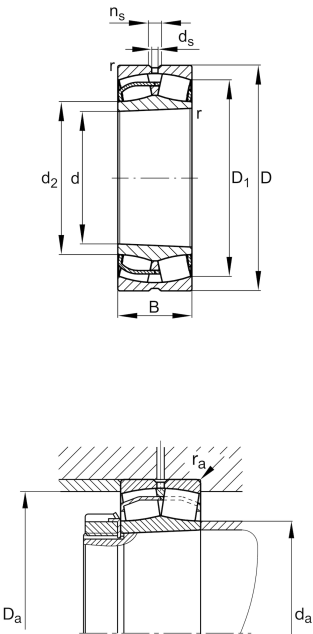

Twoja aktualna wersja produktu

Design	BE	With lose center lip ring
Bore type	K30	Tapered, taper 1:30
Cage	JPB	Sheet metal cage
Radial internal clearance	C2 (Group 2)	Internal clearance smaller than CN
Relubrication feature	Standard	

Main Dimensions & Performance Data

d	190 mm	Bore diameter
D	320 mm	Outside diameter
B	128 mm	Width
C _r	1.680.000 N	Basic dynamic load rating, radial
C _{0r}	2.550.000 N	Basic static load rating, radial
C _{ur}	232.000 N	Fatigue load limit, radial
n _G	1.850 1/min	Limiting speed
n _{gr}	880 1/min	Reference speed
≈m	40,425 kg	Masa



Mounting dimensions

$d_{a\ min}$	204 mm	Minimum diameter shaft shoulder
$D_{a\ max}$	306 mm	Maximum diameter of housing shoulder
$r_{a\ max}$	2,5 mm	Maximum recess radius

Dimensions

$r_{\ min}$	3 mm	Minimum chamfer dimension
D_1	271,6 mm	Bore diameter outer ring
d_2	217,4 mm	Raceway diameter of the inner ring
d_s	6,3 mm	Diameter lubrication hole
n_s	12,2 mm	Width of lubricating groove

Temperature range

$T_{\ min}$	-30 °C	Operating temperature min.
$T_{\ max}$	200 °C	Operating temperature max.

Calculation factors

e	0,37	Limiting value of F_a/F_r for the applicability of diff. Values of factors X and Y
Y_1	1,82	Dynamic axial load factor
Y_2	2,7	Dynamic axial load factor
Y_0	1,78	Static axial load factor

Additional information

AH24138	Withdrawal sleeve
---------	-------------------



Właściwości

-  Obciążenie promieniowe
-  Obciążenie osiowe jednokierunkowe
-  Obciążenie osiowe dwukierunkowe
-  Smarowanie smarem
-  Smarowanie olejem
-  Bez uszczelnienia
-  Łożysko gabarytowe
-  Nieosiowość statyczna
-  Nieosiowość dynamiczna