




FAG

30210-A-R

Tapered roller bearing

Tapered roller bearings with flange 302, main dimensions acc. to DIN 720, separable

Informacje techniczne

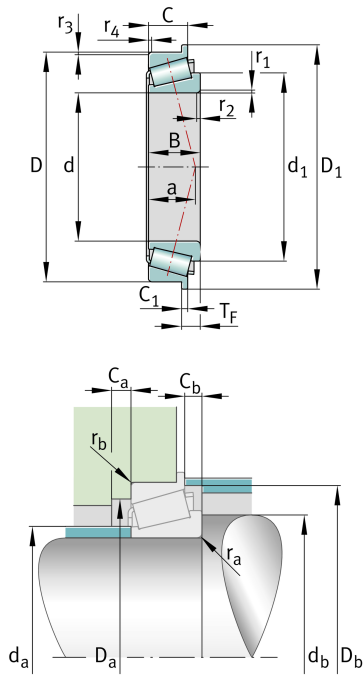

Twoja aktualna wersja produktu

Tolerance class	PN	Normal (ISO 492:2023)
Heat treatment	Standard	
Cage	Standard	Sheet steel cage, window cage, roller-guided
Internal design	Standard	
Quality level	Standard	
Number of rows	1	Single-row design

Main Dimensions & Performance Data

d	50 mm	Bore diameter
D	90 mm	Outside diameter
B	20 mm	Width, inner ring
C	17 mm	Width, outer ring
T _F	8,75 mm	Width assembled flange bearing
C _r	79.000 N	Basic dynamic load rating, radial
C _{0r}	96.000 N	Basic static load rating, radial
C _{ur}	11.500 N	Fatigue load limit, radial
n _G	8.200 1/min	Limiting speed
n _{gr}	5.000 1/min	Thermal speed rating
≈m	0,57 kg	Masa



Mounting dimensions

$d_{a \max}$	58 mm	Maximum diameter of shaft shoulder
$d_{b \min}$	57 mm	Minimum diameter of shaft shoulder
$D_{a \min}$	79 mm	Minimum diameter of housing shoulder
$D_{a \max}$	83 mm	Maximum diameter of housing shoulder
$D_{b \min}$	85 mm	Minimum diameter of housing shoulder
$C_{a \min}$	3 mm	Minimum axial space
$C_{b \min}$	4,5 mm	Minimum axial space
$r_{a \max}$	1,5 mm	Maximum fillet radius of shaft
$r_{b \max}$	1,5 mm	Maximum fillet radius of housing

Dimensions

$r_{1, 2 \min}$	1,5 mm	Minimum chamfer dimension of inner ring back face
$r_{3, 4 \min}$	1,5 mm	Minimum chamfer dimension of outer ring back face
a	20 mm	Distance between the apexes of the pressure cones
d_1	68,8 mm	Guidance rib diameter of inner ring
D_1	95 mm	Outside diameter flange
C_1	4 mm	Width flange

Temperature range

$T_{\min}$	-30 °C	Operating temperature min.
$T_{\max}$	120 °C	Operating temperature max.

Calculation factors

e	0,42	Limiting value of F_a/F_r for the applicability of diff. Values of factors X and Y
Y	1,43	Dynamic axial load factor
Y_0	0,79	Static axial load factor



Additional information

T3DB050

Comparative designation to ISO 10317 and ISO 355

Właściwości



Obciążenie promieniowe



Obciążenie osiowe jednokierunkowe



Smarowanie smarem



Smarowanie olejem



Bez uszczelnienia