




FAG

33210>B

Tapered roller bearing

Tapered roller bearings 332, main dimensions
acc. to DIN 720, separable

Informacje techniczne

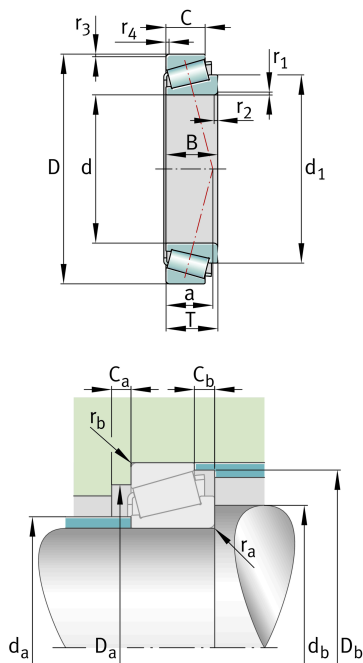

Twoja aktualna wersja produktu

Tolerance class	P6X	Class 6X (ISO 492:2023)
Heat treatment	Standard	
Cage	Standard	Sheet steel cage, window cage, roller-guided
Internal design	Standard	
Quality level	Standard	
Version code	>B	Not marked on bearing
Number of rows	1	Single-row design

Main Dimensions & Performance Data

d	50 mm	Bore diameter
D	90 mm	Outside diameter
B	32 mm	Width, inner ring
C	24,5 mm	Width, outer ring
T	32 mm	Width, total
C_r	115.000 N	Basic dynamic load rating, radial
C_{0r}	163.000 N	Basic static load rating, radial
C_{ur}	20.800 N	Fatigue load limit, radial
n_G	7.700 1/min	Limiting speed
n_{gr}	4.700 1/min	Thermal speed rating
$\approx m$	0,86 kg	Masa



Mounting dimensions

d a max	57 mm	Maximum diameter of shaft shoulder
d b min	57 mm	Minimum diameter of shaft shoulder
D a min	77 mm	Minimum diameter of housing shoulder
D a max	83 mm	Maximum diameter of housing shoulder
D b min	87 mm	Minimum diameter of housing shoulder
C a min	5 mm	Minimum axial space
C b min	7,5 mm	Minimum axial space
r a max	1,5 mm	Maximum fillet radius of shaft
r b max	1,5 mm	Maximum fillet radius of housing

Dimensions

r 1, 2 min	1,5 mm	Minimum chamfer dimension of inner ring back face
r 3, 4 min	1,5 mm	Minimum chamfer dimension of outer ring back face
a	23 mm	Distance between the apexes of the pressure cones
d 1	71,8 mm	Guidance rib diameter of inner ring

Temperature range

T min	-30 °C	Operating temperature min.
T max	120 °C	Operating temperature max.

Calculation factors

e	0,41	Limiting value of Fa/Fr for the applicability of diff. Values of factors X and Y
Y	1,45	Dynamic axial load factor
Y 0	0,8	Static axial load factor

Additional information

T3DE050	Comparative designation to ISO 10317 and ISO 355
---------	--



Właściwości



Obciążenie promieniowe



Obciążenie osiowe jednokierunkowe



Smarowanie smarem



Smarowanie olejem



Bez uszczelnienia