




3812-2Z-L404

Angular contact ball bearing

Angular contact ball bearing 38..-B-2RZ-TVH,
double row, shields, plastic cage

Informacje techniczne

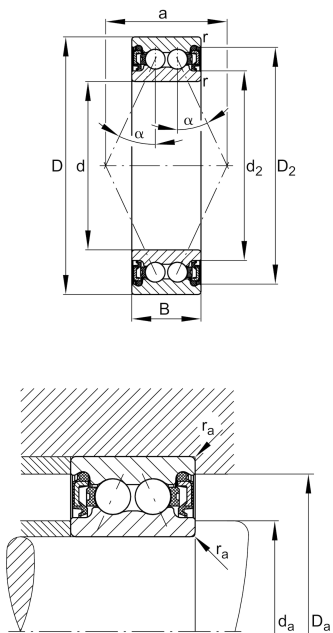

Twoja aktualna wersja produktu

Design variant	B	Bearing without filling slot
Type of Seal	2RZ	Non-contact seal on both sides
Cage	TVH	Solid cage made of glass-fiber reinforced polyamide PA66
Tolerance class	PN	Normal (ISO 492:2023)
Dimensional / heat stabilization	SN	Rings dimensional stabilized up to 120°
Lubricant	L404	Grease (L404/customer specific)
Axial internal clearance	CN	Group N (CN)

Main Dimensions & Performance Data

d	60 mm	Bore diameter
D	78 mm	Outside diameter
B	14 mm	Width
C _r	14.200 N	Basic dynamic load rating, radial
C _{0r}	17.100 N	Basic static load rating, radial
C _{ur}	970 N	Fatigue load limit, radial
n _G	6.600 1/min	Limiting speed
n _{gr}	4.700 1/min	Reference speed
≈m	0,151 kg	Masa



Mounting dimensions

$d_{a\min}$	62 mm	Minimum diameter shaft shoulder
$D_{a\max}$	76 mm	Maximum diameter of housing shoulder
$r_{a\max}$	0,3 mm	Maximum fillet radius

Dimensions

$r_{\min}$	0,3 mm	Minimum chamfer dimension
D_1	72,88 mm	Shoulder diameter outer ring
D_2	74,72 mm	Caliber diameter outer ring
d_1	67,1 mm	Shoulder diameter inner ring
d_2	65,68 mm	Caliber diamter inner ring
a	38,1 mm	Distance between the apexes of the pressure cones
α	25 °	Contact angle

Temperature range

$T_{\min}$	-30 °C	Operating temperature min.
$T_{\max}$	120 °C	Operating temperature max.

Właściwości

	Obciążenie promieniowe
	Obciążenie osiowe jednokierunkowe
	Obciążenie osiowe dwukierunkowe
	Smarowanie dożywotnie, bezobsługowe
	Smarowanie smarem
	Uszczelnienie dwustronne