




FAG

6007-C-Z>V

Deep groove ball bearing

Deep groove ball bearing 60.-C-Z, single row, Generation C, shield , steel sheet metal cage

Informacje techniczne

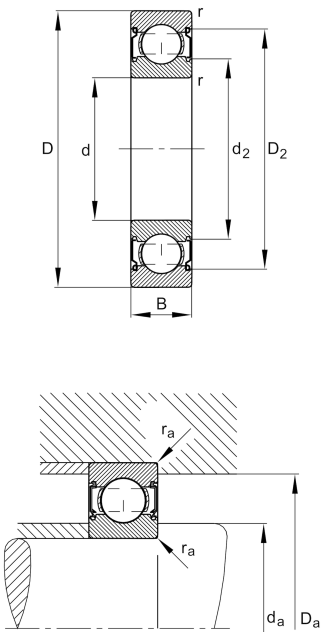

Twoja aktualna wersja produktu

|                                  |              |                                         |
|----------------------------------|--------------|-----------------------------------------|
| Version code                     | >V           | Not marked on bearing                   |
| Changed internal design          | C            | GenerationC                             |
| Type of Seal                     | Z            | Non-contact shield on one Side          |
| Cage                             | JN           | Steel sheet metal                       |
| Tolerance class                  | P6           | Class 6 (ISO 492:2023)                  |
| Dimensional / heat stabilization | SN           | Rings dimensional stabilized up to 120° |
| Lubricant                        | Without      | Bearing not greased                     |
| Radial internal clearance        | CN (Group N) | Normal internal clearance               |
| Bore type                        | Z            | Cylindrical                             |

Main Dimensions & Performance Data

|                 |              |                                   |
|-----------------|--------------|-----------------------------------|
| d               | 35 mm        | Bore diameter                     |
| D               | 62 mm        | Outside diameter                  |
| B               | 14 mm        | Width                             |
| C <sub>r</sub>  | 17.500 N     | Basic dynamic load rating, radial |
| C <sub>0r</sub> | 10.300 N     | Basic static load rating, radial  |
| C <sub>ur</sub> | 620 N        | Fatigue load limit, radial        |
| n <sub>G</sub>  | 17.700 1/min | Limiting speed                    |
| n <sub>gr</sub> | 12.600 1/min | Reference speed                   |
| ≈m              | 0,144 kg     | Masa                              |



Mounting dimensions

|                    |         |                                      |
|--------------------|---------|--------------------------------------|
| d <sub>a min</sub> | 39,6 mm | Minimum diameter shaft shoulder      |
| D <sub>a max</sub> | 57,4 mm | Maximum diameter of housing shoulder |
| r <sub>a max</sub> | 1 mm    | Maximum fillet radius                |

Dimensions

|                  |          |                              |
|------------------|----------|------------------------------|
| r <sub>min</sub> | 1 mm     | Minimum chamfer dimension    |
| D <sub>1</sub>   | 54,06 mm | Shoulder diameter outer ring |
| D <sub>2</sub>   | 56,32 mm | Caliber diameter outer ring  |
| d <sub>1</sub>   | 42,94 mm | Shoulder diameter inner ring |
| d <sub>2</sub>   | 41,31 mm | Caliber diameter inner ring  |

Temperature range

|                  |        |                            |
|------------------|--------|----------------------------|
| T <sub>min</sub> | -30 °C | Operating temperature min. |
| T <sub>max</sub> | 120 °C | Operating temperature max. |

Calculation factors

|                |      |                    |
|----------------|------|--------------------|
| f <sub>0</sub> | 14,9 | Calculation factor |
|----------------|------|--------------------|