




FAG

6016-H-2RSR-SN>N

Deep groove ball bearing

Deep groove ball bearing 60...-H-2RSR, single row, H-Series, seals, steel sheet metal cage

Informacje techniczne

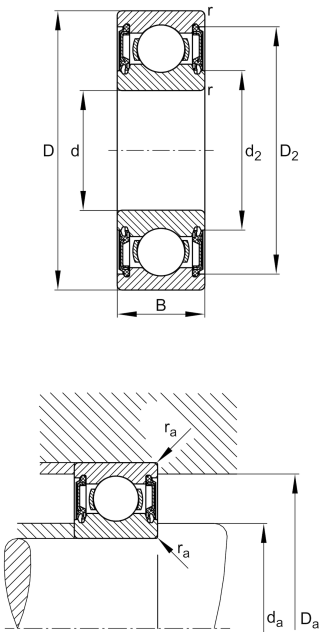

Twoja aktualna wersja produktu

Version code	>N	Not marked on bearing
Changed internal design	H	Design variant H (H-Series)
Type of Seal	2RSR	Contact seal on both sides
Cage	JN	Steel sheet metal
Tolerance class	PN	Normal (ISO 492:2023)
Dimensional / heat stabilization	SN	Rings dimensional stabilized up to 120°
Lubricant	Lubricating grease	
Radial internal clearance	CN (Group N)	Normal internal clearance
Bore type	Z	Cylindrical

Main Dimensions & Performance Data

d	80 mm	Bore diameter
D	125 mm	Outside diameter
B	22 mm	Width
C _r	42.330 N	Basic dynamic load rating, radial
C _{0r}	35.640 N	Basic static load rating, radial
C _{ur}	2.190 N	Fatigue load limit, radial
n _G	2.850 1/min	Limiting speed
≈m	0,849 kg	Masa



Mounting dimensions

d a min	86 mm	Minimum diameter shaft shoulder
D a max	119 mm	Maximum diameter of housing shoulder
r a max	1 mm	Maximum fillet radius

Dimensions

r min	1,1 mm	Minimum chamfer dimension
D 1	111,8 mm	Shoulder diameter outer ring
D 2	115,7 mm	Caliber diameter outer ring
d 1	94,6 mm	Shoulder diameter inner ring
d 2	92,05 mm	Caliber diameter inner ring

Temperature range

T min	-20 °C	Operating temperature min.
T max	100 °C	Operating temperature max.

Calculation factors

f 0	15,7	Calculation factor
-----	------	--------------------

Właściwości

	Obciążenie promieniowe
	Obciążenie osiowe jednokierunkowe
	Obciążenie osiowe dwukierunkowe
	Smarowanie dożywotnie, bezobsługowe
	Smarowanie smarem
	Uszczelnienie dwustronne