




FAG

6206-C-2HRS-L408-C3>V

Deep groove ball bearing

Deep groove ball bearing 62...-C-2HRS, single row, Generation C, seals, steel sheet metal cage

Informacje techniczne

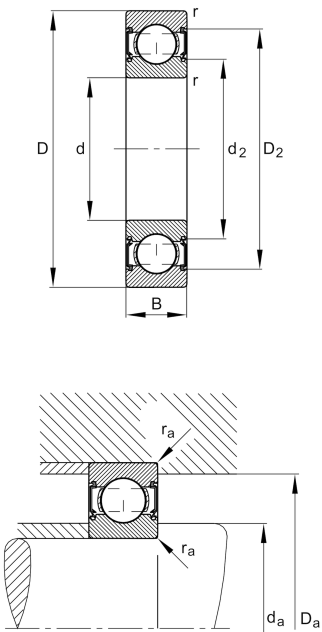

Twoja aktualna wersja produktu

Version code	>V	Not marked on bearing
Changed internal design	C	GenerationC
Type of Seal	2HRS	Contact seal on both sides
Cage	JN	Steel sheet metal
Tolerance class	P6	Class 6 (ISO 492:2023)
Dimensional / heat stabilization	SN	Rings dimensional stabilized up to 120°
Lubricant	L408	Grease (L408/customer specific)
Radial internal clearance	C3 (Group 3)	Internal clearance larger than CN
Bore type	Z	Cylindrical

Main Dimensions & Performance Data

d	30 mm	Bore diameter
D	62 mm	Outside diameter
B	16 mm	Width
C _r	22.000 N	Basic dynamic load rating, radial
C _{0r}	11.300 N	Basic static load rating, radial
C _{ur}	770 N	Fatigue load limit, radial
n _G	10.200 1/min	Limiting speed
≈m	0,191 kg	Masa



Mounting dimensions

$d_{a\ min}$	35,6 mm	Minimum diameter shaft shoulder
$D_{a\ max}$	56,4 mm	Maximum diameter of housing shoulder
$r_{a\ max}$	1 mm	Maximum fillet radius

Dimensions

$r_{\ min}$	1 mm	Minimum chamfer dimension
$D_{\ 1}$	52,67 mm	Shoulder diameter outer ring
$D_{\ 2}$	54,91 mm	Caliber diameter outer ring
$d_{\ 1}$	39,33 mm	Shoulder diameter inner ring
$d_{\ 2}$	37,72 mm	Caliber diameter inner ring

Temperature range

$T_{\ min}$	-30 °C	Operating temperature min.
$T_{\ max}$	100 °C	Operating temperature max.

Calculation factors

$f_{\ 0}$	13,8	Calculation factor
-----------	------	--------------------

Właściwości

	Obciążenie promieniowe
	Obciążenie osiowe jednokierunkowe
	Obciążenie osiowe dwukierunkowe
	Smarowanie dożywotnie, bezobsługowe
	Smarowanie smarem
	Uszczelnienie dwustronne