



FAG


6312-C-Z-N

Deep groove ball bearing

Deep groove ball bearing 63.-C-Z-N, single row, Generation C, shield , ring groove, steel sheet metal cage



Informacje techniczne

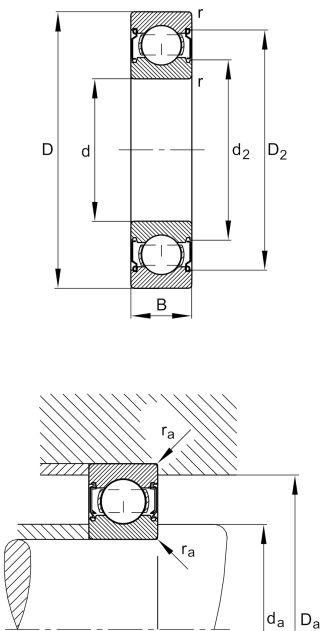

Twoja aktualna wersja produktu

Changed internal design	C	GenerationC
Type of Seal	Z	Non-contact shield on one Side
Design, bearing outer ring	N	Ring groove for snap ring
Cage	JN	Steel sheet metal
Tolerance class	P6	Class 6 (ISO 492:2023)
Dimensional / heat stabilization	S0	Rings dimensional stabilized up to 150°
Lubricant	Without	Bearing not greased
Radial internal clearance	CN (Group N)	Normal internal clearance
Bore type	Z	Cylindrical

Main Dimensions & Performance Data

d	60 mm	Bore diameter
D	130 mm	Outside diameter
B	31 mm	Width
C _r	89.000 N	Basic dynamic load rating, radial
C _{0r}	52.000 N	Basic static load rating, radial
C _{ur}	3.600 N	Fatigue load limit, radial
n _G	7.900 1/min	Limiting speed
n _{gr}	7.400 1/min	Reference speed
≈m	1,6 kg	Masa



Mounting dimensions

$d_{a \min}$	72 mm	Minimum diameter shaft shoulder
$D_{a \max}$	118 mm	Maximum diameter of housing shoulder
$r_{a \max}$	2,1 mm	Maximum fillet radius

Dimensions

$r_{\min}$	2,1 mm	Minimum chamfer dimension
D_1	109,02 mm	Shoulder diameter outer ring
D_2	112,14 mm	Caliber diameter outer ring
d_1	81,7 mm	Shoulder diameter inner ring
d_2	79,58 mm	Caliber diameter inner ring

Temperature range

$T_{\min}$	-30 °C	Operating temperature min.
$T_{\max}$	150 °C	Operating temperature max.

Calculation factors

f_0	13,2	Calculation factor
-------	------	--------------------

Właściwości

	Obciążenie promieniowe
	Obciążenie osiowe jednokierunkowe
	Obciążenie osiowe dwukierunkowe
	Smarowanie smarem
	Smarowanie olejem
	Uszczelnienie jednostronne