



FAG




X-life

7206-B-XL-2RS-TVP-UL

Angular contact ball bearing

Angular contact ball bearing 72..-B-XL-2RS-TVP, single row, X-life, seals, plastic cage

Informacje techniczne

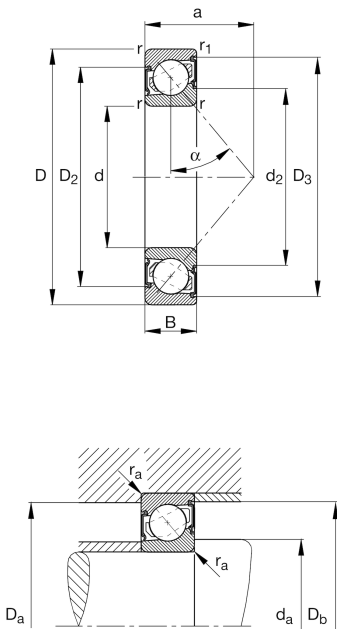

Twoja aktualna wersja produktu

Design variant	B	B
Type of Seal	2RS	Contact seal on both sides
Cage	TVP	Solid cage made of glass-fiber reinforced polyamid PA66
Tolerance class	P6	Class 6 (ISO 492:2023)
Dimensional / heat stabilization	S0	Rings dimensional stabilized up to 150°
Bearing with matched conditions for fitting in pairs	UL	Bearing set with light preload
Lubricant	GA14	Ball bearing grease, low noise

Main Dimensions & Performance Data

d	30 mm	Bore diameter
D	62 mm	Outside diameter
B	16 mm	Width
C _r	23.100 N	Basic dynamic load rating, radial
C _{0r}	14.100 N	Basic static load rating, radial
C _{ur}	980 N	Fatigue load limit, radial
n _G	6.500 1/min	Limiting speed
≈m	0,208 kg	Masa



Mounting dimensions

d a min	35,6 mm	Minimum diameter of shaft shoulder
D a max	56,4 mm	Maximum diameter of housing shoulder
D b max	57,8 mm	Maximum diameter of housing shoulder
r a max	1 mm	Maximum fillet radius of shaft
r a1 max	0,6 mm	Maximum fillet radius of housing

Dimensions

r min	1 mm	Minimum chamfer dimension
r 1 min	0,6 mm	Minimum chamfer dimension
D 1	49,52 mm	Shoulder diameter on outer ring wide side face
D 2	51,65 mm	Caliber diameter on outer ring wide side face
D 3	57,07 mm	Caliber diameter on outer ring small side face
d 1	43,2 mm	Shoulder diameter on inner ring wide side face
d 2	39,49 mm	Caliber diameter on inner ring wide side face
a	27,3 mm	Distance between the apexes of the pressure cones
α	40 °	Contact angle

Temperature range

T min	-20 °C	Operating temperature min.
T max	100 °C	Operating temperature max.

Additional information

V max	-6 μm	Preload per set max.
Tol (+)	8 μm	Tolerance for axial clearance or preload per set
F V max	157 N	Preload force



Właściwości

-  Obciążenie promieniowe
-  Obciążenie osiowe jednokierunkowe
-  Smarowanie dożywotnie, bezobsługowe
-  Smarowanie smarem
-  Uszczelnienie dwustronne