


89315-M

Axial cylindrical roller bearing

Axial cylindrical roller bearing 893..-M, two-row

Informacje techniczne

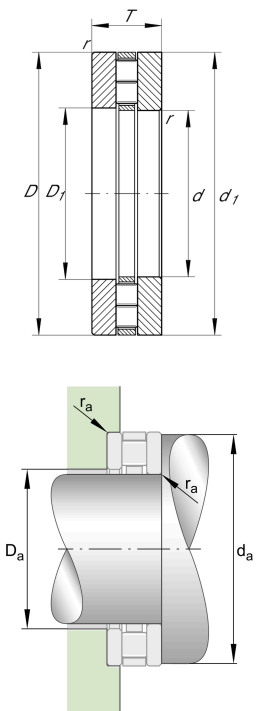

Twoja aktualna wersja produktu

Cage	M	Brass Cage
------	---	------------

Main Dimensions & Performance Data

d	75 mm	Bore diameter
D	135 mm	Outside diameter
T	36 mm	Height
C _a	275.000 N	Basic dynamic load rating, axial
C _{0a}	960.000 N	Basic static load rating, axial
C _{ua}	88.000 N	Fatigue load limit, axial
n _G	2.700 1/min	Limiting speed
n _{gr}	1.110 1/min	Reference speed
m	2,57 kg	Masa

Mounting dimensions

d _a	132 mm	Minimum diameter shaft shoulder
D _a	81 mm	Maximum diameter of housing shoulder
r _a	1,5 mm	Recess radius



Dimensions

D ₁	77 mm	Bore diameter housing washer
d ₁	135 mm	Rip diameter shaft washer
B	12,5 mm	Width
r _{min}	1,5 mm	Minimum chamfer dimension
D _{c1}	75 mm	Cage bore diameter

Temperature range

T _{min}	-20 °C	Operating temperature min.
T _{max}	120 °C	Operating temperature max.

Additional information

K89315-M	Axial roller and cage assembly
GS89315	Housing Washer
WS89315	Shaft washer

Właściwości

	Obciążenie osiowe jednokierunkowe
	Smarowanie smarem
	Smarowanie olejem
	Bez uszczelnienia