
**AXK1024-A/0-10** [🔗](#)

## Axial needle roller and cage assembly

Axial needle roller and cage assemblies,  
single direction, to DIN 5405-2

## Informacje techniczne

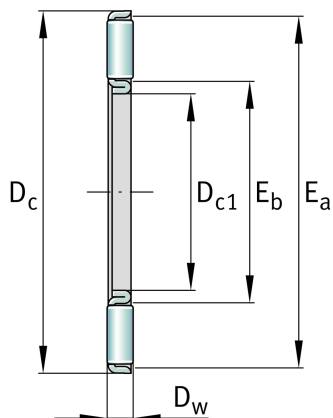

## Main Dimensions &amp; Performance Data

|             |              |                                  |
|-------------|--------------|----------------------------------|
| $D_{c1}$    | 10 mm        | Bore diameter cage               |
| $D_c$       | 24 mm        | Outside diameter                 |
| $D_w$       | 2 mm         | Rolling element diameter         |
| $E_a$       | 23 mm        | Raceway dimension                |
| $E_b$       | 12 mm        | Raceway dimension                |
| $c_a$       | 9.200 N      | Basic dynamic load rating, axial |
| $c_{0a}$    | 25.500 N     | Basic static load rating, axial  |
| $c_{ua}$    | 2.550 N      | Fatigue load limit, axial        |
| $n_G$       | 16.900 1/min | Limiting speed                   |
| $n_{gr}$    | 7.400 1/min  | Reference speed                  |
| $\approx m$ | 3,107 g      | Masa                             |

## Temperature range

|           |        |                            |
|-----------|--------|----------------------------|
| $T_{min}$ | -20 °C | Operating temperature min. |
| $T_{max}$ | 120 °C | Operating temperature max. |

## Additional information

AS1024

Axial bearing washer