
**AXK1730-A/0-10** [🔗](#)

Axial needle roller and cage assembly

Axial needle roller and cage assemblies,
single direction, to DIN 5405-2

Informacje techniczne

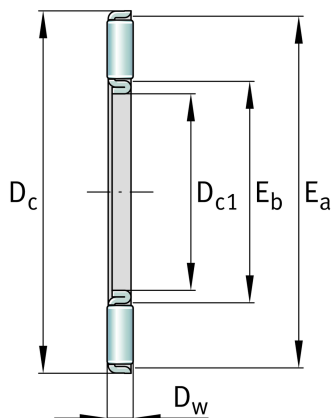

Main Dimensions & Performance Data

D_{c1}	17 mm	Bore diameter cage
D_c	30 mm	Outside diameter
D_w	2 mm	Rolling element diameter
E_a	29 mm	Raceway dimension
E_b	19 mm	Raceway dimension
c_a	12.000 N	Basic dynamic load rating, axial
c_{0a}	39.500 N	Basic static load rating, axial
c_{ua}	4.000 N	Fatigue load limit, axial
n_G	12.300 1/min	Limiting speed
n_{gr}	4.600 1/min	Reference speed
$\approx m$	4,15 g	Masa

Temperature range

T_{min}	-20 °C	Operating temperature min.
T_{max}	120 °C	Operating temperature max.

Additional information

AS1730

Axial bearing washer