




**AXS2034**

Axial conical thrust cage needle roller bearing

Axial angular contact roller bearing

Informacje techniczne

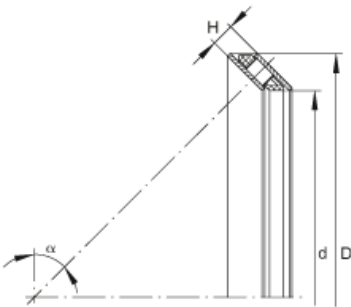

Main Dimensions & Performance Data

|                 |          |                                  |
|-----------------|----------|----------------------------------|
| d               | 20 mm    | Bore diameter                    |
| D               | 34 mm    | Outer diameter                   |
| H               | 5 mm     | Height                           |
| max             | -0,1 mm  | Tolerance height max.            |
| min             | -0,2 mm  | Tolerance height min.            |
| $\alpha$        | 60 °     | Contact angle                    |
| C <sub>a</sub>  | 9.800 N  | Basic dynamic load rating, axial |
| C <sub>0a</sub> | 25.000 N | Basic static load rating, axial  |
| ≈m              | 16 g     | Masa                             |

Dimensions

|     |          |                                         |
|-----|----------|-----------------------------------------|
| da  | 20,2 mm  | Centering on the shaft                  |
| max | -0,05 mm | Centering tolerance in the housing max. |
| min | -0,15 mm | Centering tolerance in the housing min. |
| Da  | 34,2 mm  | Centering in the housing                |
| max | 0,15 mm  | Centering tolerance on the shaft max.   |
| min | 0,05 mm  | Centering tolerance on the shaft min.   |



Temperature range

|                  |        |                            |
|------------------|--------|----------------------------|
| T <sub>min</sub> | -30 °C | Operating temperature min. |
| T <sub>max</sub> | 120 °C | Operating temperature max. |