
**FAG****B7048-E-T-P4S-UL**

## Spindle bearing

Spindle bearing B70...-E, adjusted, in pairs or sets, contact angle  $\alpha = 25^\circ$ , restricted tolerances

## Informacje techniczne





## Twoja aktualna wersja produktu

|                         |         |                                                                  |
|-------------------------|---------|------------------------------------------------------------------|
| Preload class           | L       | Preload light                                                    |
| Contact angle           | E       | Contact angle $25^\circ$                                         |
| Tolerance class         | P4S     | Tolerance class P4S, FAG standard better than P4 to ISO 492:2023 |
| Sealing                 | Without | Not sealed                                                       |
| Cage                    | T       | Laminated fabric cage                                            |
| Arrangement bearing set | U       | Single bearing                                                   |

## Main Dimensions &amp; Performance Data

|                    |             |                                       |
|--------------------|-------------|---------------------------------------|
| d                  | 240 mm      | Bore diameter                         |
| D                  | 360 mm      | Outside diameter                      |
| B                  | 56 mm       | Width                                 |
| $C_r$              | 320.000 N   | Basic dynamic load rating, radial     |
| $C_{0r}$           | 310.000 N   | Basic static load rating, radial      |
| $C_{ur}$           | 19.000 N    | Fatigue load limit, radial            |
| $n_G$<br>Grease    | 3.200 1/min | Limiting speed for grease lubrication |
| $n_{G\text{ Oil}}$ | 5.000 1/min | Limiting speed for oil lubrication    |
| $\approx m$        | 16,5 kg     | Masa                                  |

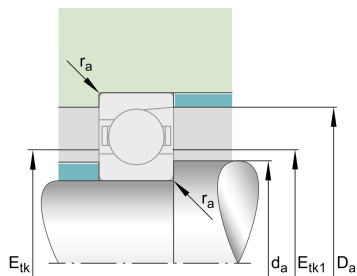



Mounting dimensions

|                      |          |                                                   |
|----------------------|----------|---------------------------------------------------|
| d <sub>a</sub>       | 260 mm   | Diameter shaft shoulder                           |
| d <sub>a</sub>       | h12      | Diameter shaft shoulder clearance                 |
| D <sub>a</sub>       | 341 mm   | Shoulder diameter outer ring                      |
| D <sub>a</sub>       | H12      |                                                   |
| r <sub>a</sub> max   | 2,5 mm   | Maximum recess radius                             |
| r <sub>a1</sub> max  | 1 mm     | Maximum recess radius                             |
| E <sub>tk</sub> min  | 277,1 mm | Minimum diameter injection pitch                  |
| E <sub>tk</sub> max  | 290 mm   | Maximum diameter injection pitch                  |
| E <sub>tk1</sub> min | 277,1 mm | Minimum diameter injection pitch                  |
| E <sub>tk1</sub> max | 290 mm   | Maximum diameter injection pitch                  |
| a                    | 97,9 mm  | Distance between the apexes of the pressure cones |

Dimensions

|                    |      |                           |
|--------------------|------|---------------------------|
| r <sub>min</sub>   | 3 mm | Minimum chamfer dimension |
| r <sub>1</sub> min | 3 mm | Minimum chamfer dimension |
| α                  | 25 ° | Contact angle             |

Temperature range

|                  |        |                            |
|------------------|--------|----------------------------|
| T <sub>min</sub> | -30 °C | Operating temperature min. |
| T <sub>max</sub> | 100 °C | Operating temperature max. |



Additional information

|           |                  |                       |
|-----------|------------------|-----------------------|
| $F_{VL}$  | 2.914 N          | Preload force light   |
| $F_{VM}$  | 9.801 N          | Preload force medium  |
| $F_{VH}$  | 20.327 N         | Preload force heavy   |
| $K_{aEL}$ | 8.437 N          | Lift-off force light  |
| $K_{aEM}$ | 29.140 N         | Lift-off force medium |
| $K_{aEH}$ | 62.090 N         | Lift-off force heavy  |
| $c_{aL}$  | 521 N/ $\mu$ m   | Axial rigidity light  |
| $c_{aM}$  | 817 N/ $\mu$ m   | Axial rigidity medium |
| $c_{aH}$  | 1.092 N/ $\mu$ m | Axial rigidity heavy  |

Właściwości

-  Obciążenie promieniowe
-  Obciążenie osiowe jednokierunkowe
-  Smarowanie smarem
-  Smarowanie olejem
-  Bez uszczelnienia
-  Łożysko gabarytowe