




FAG

**B7213-E-T-P4S-UL**

Spindle bearing

Spindle bearing B72...-E, adjusted, in pairs or sets, contact angle  $\alpha = 25^\circ$ , restricted tolerances

Informacje techniczne

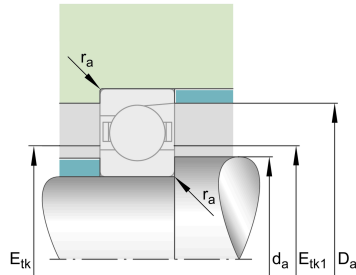

Twoja aktualna wersja produktu

|                         |         |                                                                  |
|-------------------------|---------|------------------------------------------------------------------|
| Preload class           | L       | Preload light                                                    |
| Contact angle           | E       | Contact angle 25°                                                |
| Tolerance class         | P4S     | Tolerance class P4S, FAG standard better than P4 to ISO 492:2023 |
| Sealing                 | Without | Not sealed                                                       |
| Cage                    | T       | Laminated fabric cage                                            |
| Arrangement bearing set | U       | Single bearing                                                   |

Main Dimensions & Performance Data

|                       |              |                                       |
|-----------------------|--------------|---------------------------------------|
| d                     | 65 mm        | Bore diameter                         |
| D                     | 120 mm       | Outside diameter                      |
| B                     | 23 mm        | Width                                 |
| C <sub>r</sub>        | 65.000 N     | Basic dynamic load rating, radial     |
| C <sub>0r</sub>       | 36.500 N     | Basic static load rating, radial      |
| C <sub>ur</sub>       | 3.850 N      | Fatigue load limit, radial            |
| n <sub>G Grease</sub> | 11.000 1/min | Limiting speed for grease lubrication |
| n <sub>G Oil</sub>    | 18.000 1/min | Limiting speed for oil lubrication    |
| ≈m                    | 0,991 kg     | Masa                                  |



Mounting dimensions

|                      |          |                                                   |
|----------------------|----------|---------------------------------------------------|
| d <sub>a</sub>       | 75,5 mm  | Diameter shaft shoulder                           |
| d <sub>a</sub>       | h12      | Diameter shaft shoulder clearance                 |
| D <sub>a</sub>       | 109,5 mm | Shoulder diameter outer ring                      |
| D <sub>a</sub>       | H12      |                                                   |
| r <sub>a</sub> max   | 1,5 mm   | Maximum recess radius                             |
| r <sub>a1</sub> max  | 0,6 mm   | Maximum recess radius                             |
| E <sub>tk</sub> min  | 83 mm    | Minimum diameter injection pitch                  |
| E <sub>tk</sub> max  | 88,6 mm  | Maximum diameter injection pitch                  |
| E <sub>tk1</sub> min | 83 mm    | Minimum diameter injection pitch                  |
| E <sub>tk1</sub> max | 88,6 mm  | Maximum diameter injection pitch                  |
| a                    | 33,1 mm  | Distance between the apexes of the pressure cones |

Dimensions

|                    |        |                           |
|--------------------|--------|---------------------------|
| r <sub>min</sub>   | 1,5 mm | Minimum chamfer dimension |
| r <sub>1</sub> min | 1,5 mm | Minimum chamfer dimension |
| α                  | 25 °   | Contact angle             |

Temperature range

|                  |        |                            |
|------------------|--------|----------------------------|
| T <sub>min</sub> | -30 °C | Operating temperature min. |
| T <sub>max</sub> | 100 °C | Operating temperature max. |



Additional information

|           |                |                       |
|-----------|----------------|-----------------------|
| $F_{VL}$  | 585 N          | Preload force light   |
| $F_{VM}$  | 1.977 N        | Preload force medium  |
| $F_{VH}$  | 4.100 N        | Preload force heavy   |
| $K_{aEL}$ | 1.709 N        | Lift-off force light  |
| $K_{aEM}$ | 5.978 N        | Lift-off force medium |
| $K_{aEH}$ | 12.828 N       | Lift-off force heavy  |
| $c_{aL}$  | 185 N/ $\mu$ m | Axial rigidity light  |
| $c_{aM}$  | 295 N/ $\mu$ m | Axial rigidity medium |
| $c_{aH}$  | 399 N/ $\mu$ m | Axial rigidity heavy  |

Właściwości

- 

Obciążenie promieniowe
- 

Obciążenie osiowe jednokierunkowe
- 

Smarowanie smarem
- 

Smarowanie olejem
- 

Bez uszczelnienia