


BK2538-ZW

Drawn cup needle roller bearing closed end

Drawn cup needle roller bearings with closed end BK, to DIN 618/ISO 3245

Informacje techniczne

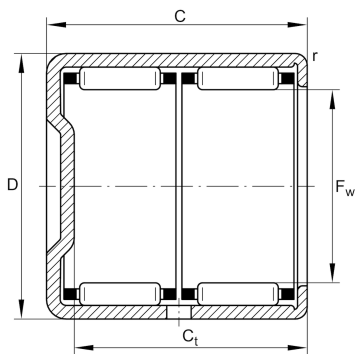

Twoja aktualna wersja produktu

Lubricant	Without	
Number of rows	2	Double-row design

Main Dimensions & Performance Data

F _w	25 mm	Under roller diameter
D	32 mm	Outside diameter
C	38 mm	Width, outer ring
C _r	34.000 N	Basic dynamic load rating, radial
C _{0r}	66.000 N	Basic static load rating, radial
C _{ur}	8.600 N	Fatigue load limit, radial
n _G	10.200 1/min	Limiting speed
n _{gr}	7.300 1/min	Reference speed
≈m	67,486 g	Masa

Dimensions

r _{min}	0,8 mm	Minimum chamfer dimension
C _{t min}	35,3 mm	Minimum width to base of drawn cup with closed end

Temperature range

T _{min}	-30 °C	Operating temperature min.
T _{max}	140 °C	Operating temperature max.



Additional information

LR20X25X38,5	Suitable inner rings LR
IR20X25X38,5-XL	Suitable inner rings IR

Właściwości

-  Obciążenie promieniowe
-  Smarowanie smarem
-  Smarowanie olejem
-  Bez uszczelnienia
-  Mała przestrzeń zabudowy