




E35-XL-KTT-B-2C

Radial insert ball bearing

Radial insert ball bearing E...KTT-B

X-life

Informacje techniczne

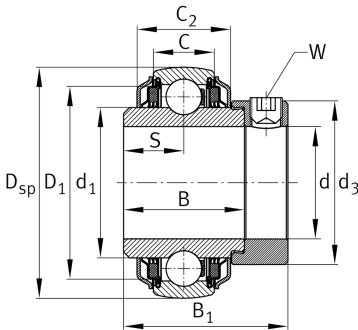

Twoja aktualna wersja produktu

Flinger shields	2C	Flinger shield on both sides
-----------------	----	------------------------------

Main Dimensions & Performance Data

d	35 mm	Bore diameter
D SP	72 mm	Outside diameter
B	37,7 mm	Width
C 0r	15.300 N	Basic static load rating, radial
B 1	51,3 mm	Locking collar total width
C r	27.500 N	Basic dynamic load rating, radial
≈m	0,65 kg	Masa

Dimensions

C	19 mm	Width, outer ring
C 2	23,7 mm	Sealing total width
S	18,7 mm	Distance raceway
d 1	46,8 mm	Rib diameter inner ring
D 1	60 mm	Outside diameter seal
d 3	55 mm	Outside diameter locking collar/locknut
W	5 mm	Width of flats



Temperature range

$T_{\min}$	-20 °C	Operating temperature min.
$T_{\max}$	120 °C	Operating temperature max.

Właściwości

-  Obciążenie promieniowe
-  Obciążenie osiowe jednokierunkowe
-  Obciążenie osiowe dwukierunkowe
-  Smarowanie dożywotnie, bezobsługowe
-  Smarowanie smarem
-  Uszczelnienie dwustronne
-  Nieosiowość statyczna