


**EGW42-E40** **Thrust washer**


Thrust washer, maintenance-free, material in accordance with ISO 3547-4, with steel backing

Informacje techniczne**Tvoja aktualna wersja produktu**

Maintenance	Maintenance free	
Material sliding Layer	E40	Maintenance-free sliding layer E40
Material back	Steel	

Main Dimensions & Performance Data

D_i	42 mm	Inner diameter
s_3	1,5 mm	Wall thickness
C_a	285.000 N	Basic dynamic load rating, axial
C_{0a}	509.000 N	Basic static load rating, axial
D_o	66 mm	Outer Diameter
$\approx m$	23,82 g	Masa

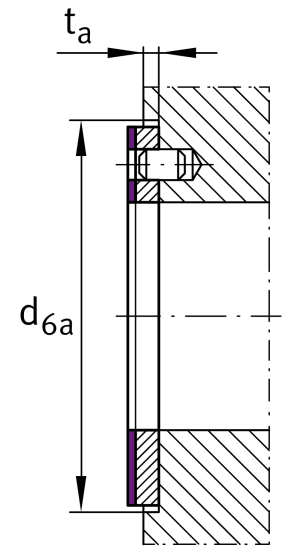

Dimensions

J	54 mm	Pitch circle
d ₁	4 mm	Fixing hole diameter
t _a	1 mm	Mounting dimension
d _{6a}	66 mm	Mounting dimension d _{6a}
D _o UT	-0,25 mm	Outside diameter, lower tolerance
D _i OT	0,25 mm	Inner diameter, upper tolerance
D _i UT	0 mm	Inner diameter, lower tolerance
D _o OT	0 mm	Outside diameter, upper tolerance
s ₃ OT	0 mm	Wall thickness, upper tolerance
s ₃ UT	-0,05 mm	Wall thickness, lower tolerance
J OT	0,12 mm	Pitch circle, upper tolerance
J UT	-0,12 mm	Pitch circle, lower tolerance
d ₁ OT	0,4 mm	Fixing hole diameter, upper tolerance
d ₁ UT	0,1 mm	Fixing hole diameter, lower tolerance
t _a OT	0,2 mm	Mounting dimension, upper tolerance
t _a UT	-0,2 mm	Mounting dimension, lower tolerance
d _{6a} OT	0,12 mm	Mounting dimension d _{6a} , upper tolerance
d _{6a} UT	0 mm	Mounting dimension d _{6a} , lower tolerance

Temperature range

T _{min}	-200 °C	Operating temperature min.
T _{max}	280 °C	Operating temperature max.



Właściwości

-  Obciążenie osiowe jednokierunkowe
-  Smarowanie dożywotnie, bezobsługowe
-  Bez uszczelnienia
-  Mała przestrzeń zabudowy