




GE10-PB

Spherical plain bearing

Radial spherical plain bearing, requiring maintenance, sliding contact surface: steel/bronze, DIN ISO 12240-1, dimension series K, open design

Informacje techniczne

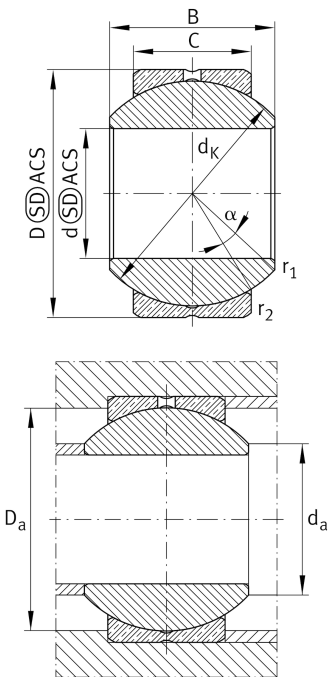

Twoja aktualna wersja produktu

Maintenance	Maintenance required
Material	Steel
Sealing	Without
Radial internal clearance	CN (Group N)Normal internal clearance
Coating	Without

Main Dimensions & Performance Data

d	10 mm	Bore diameter bearing
D	22 mm	Outside diameter bearing
B	14 mm	Width inner ring
C _r	10.000 N	Basic dynamic load rating, radial
C _{0r}	25.000 N	Basic static load rating, radial
≈m	27,39 g	Masa

Mounting dimensions

r _{1smin}	0,3 mm	Edge Spacing
r _{2smin}	0,3 mm	Edge Spacing
d _{a max}	12,9 mm	Connection measure Inner ring
D _{a min}	17 mm	Housing Connection Diameter



Dimensions

C	10,5 mm	Width Outer ring
d _K	19,05 mm	Ball diameter
α	13 °	Tilt angle
d _{OT}	0,015 mm	Bore diameter bearing, upper tolerance
d _{UT}	0 mm	Bore diameter bearing, lower tolerance
d _T	H7	Bore diameter bearing, tolerance
D _{OT}	0 mm	Outside diameter, upper tolerance
D _{UT}	-0,009 mm	Outside diameter, lower tolerance
B _{OT}	0 mm	Width inner ring, upper tolerance
B _{UT}	-0,12 mm	Width inner ring, lower tolerance
C _{OT}	0 mm	Width outer ring, upper tolerance
C _{UT}	-0,24 mm	Width outer ring, lower tolerance
G _r	0,006 - 0,035	Radial Clearance
G _{rmax}	0,035 mm	Radial clearance, maximum
G _{rmin}	0,006 mm	Radial clearance, minimum

Temperature range

T _{min}	-60 °C	Operating temperature min.
T _{max}	250 °C	Operating temperature max.



Właściwości

-  Obciążenie promieniowe
-  Obciążenie osiowe jednokierunkowe
-  Obciążenie osiowe dwukierunkowe
-  Smarowanie smarem
-  Bez uszczelnienia
-  Nieosiowość statyczna
-  Nieosiowość dynamiczna