





GE120-AX

Spherical plain bearing

Axial spherical plain bearing, requiring maintenance, sliding contact surface: steel/ steel



Informacje techniczne

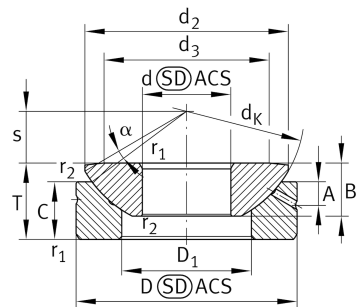

Twoja aktualna wersja produktu

Maintenance	Maintenance required	
Coating	Durotect M	Inner- and outer ring coated with Durotect M (Manganese Phosphate)

Main Dimensions & Performance Data

d	120 mm	Inner diameter bearing
D	230 mm	Outside diameter bearing
T	64 mm	Height
C _a	1.620.000 N	Basic dynamic load rating, axial
C _{0a}	6.230.000 N	Basic static load rating, axial
≈m	12,9 kg	Masa

Mounting dimensions

r _{1smin}	1 mm	Edge Spacing
r _{2smin}	0,3 mm	Edge Spacing
d _{a max}	170 mm	Connection measure Inner ring
D _{a min}	162 mm	Housing Connection Diameter



Dimensions

d _K	245 mm	Ball diameter
d ₃	170	Front surface diameter of shaft washer
D ₁	154 mm	Inner diameter of housing washer
B	52 mm	Width Inner ring
C	45 mm	Width Outer ring
s	52,5 mm	Plane Surface Spacing
A	16,5 mm	Distance lubrication Bore
α	6,5 °	Tilt angle
d _{OT}	0 mm	Bore diameter bearing, upper tolerance
d _{UT}	-0,02 mm	Bore diameter bearing, lower tolerance
D _{OT}	0 mm	Outer diameter, upper tolerance
D _{UT}	-0,03 mm	Outside diameter, lower tolerance
T _{OT}	0 mm	Height, upper tolerance
T _{UT}	-0,4 mm	Height, lower tolerance
C _{UT}	0 mm	Width outer ring, upper tolerance
C _{OT}	-0,4 mm	Width outer ring, lower tolerance
B _{OT}	0 mm	Width inner ring, upper tolerance
B _{UT}	-0,4 mm	Width inner ring, lower tolerance
d ₂	214 mm	Connection measure Inner ring

Temperature range

T _{min}	-60 °C	Operating temperature min.
T _{max}	200 °C	Operating temperature max.



Właściwości

-  Obciążenie promieniowe
-  Obciążenie osiowe jednokierunkowe
-  Smarowanie smarem
-  Bez uszczelnienia
-  Nieosiowość statyczna
-  Nieosiowość dynamiczna