


GE22-ZO-E

Spherical plain bearing

Radial spherical plain bearing, requiring maintenance, sliding contact surface: steel/ steel, inch size, open design

Informacje techniczne

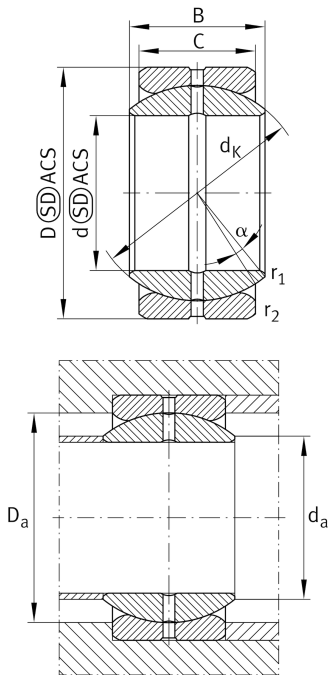

Twoja aktualna wersja produktu

Maintenance	Maintenance required	
Material	Steel	
Sealing	Without	
Radial internal clearance	CN (Group N)	Normal internal clearance
Coating	Durotect M	Inner- and outer ring coated with Durotect M (Manganese Phosphate)

Main Dimensions & Performance Data

d	22,225 mm	Bore diameter bearing
D	36,513 mm	Outside diameter bearing
B	19,431 mm	Width inner ring
C _r	42.700 N	Basic dynamic load rating, radial
C _{0r}	213.000 N	Basic static load rating, radial
≈m	0,084 kg	Masa

Mounting dimensions

r _{1smin}	0,3 mm	Edge Spacing
r _{2smin}	0,6 mm	Edge Spacing
d _{a max}	25,4 mm	Connection measure Inner ring
D _{a min}	28,5 mm	Housing Connection Diameter



Dimensions

C	16,662 mm	Width Outer ring
d _K	32 mm	Ball diameter
α	6 °	Tilt angle
d _{OT}	0 mm	Bore diameter bearing, upper tolerance
d _{UT}	-0,01 mm	Bore diameter bearing, lower tolerance
d _T	0,010	Bore diameter bearing, tolerance
D _{OT}	0 mm	Outside diameter, upper tolerance
D _{UT}	-0,011 mm	Outside diameter, lower tolerance
B _{OT}	0 mm	Width inner ring, upper tolerance
B _{UT}	-0,12 mm	Width inner ring, lower tolerance
C _{OT}	0 mm	Width outer ring, upper tolerance
C _{UT}	-0,24 mm	Width outer ring, lower tolerance
G _r	0,08 - 0,18	Radial Clearance
G _{rmax}	0,18 mm	Radial clearance, maximum
G _{rmin}	0,08 mm	Radial clearance, minimum

Temperature range

T _{min}	-60 °C	Operating temperature min.
T _{max}	200 °C	Operating temperature max.



Właściwości

-  Obciążenie promieniowe
-  Obciążenie osiowe jednokierunkowe
-  Obciążenie osiowe dwukierunkowe
-  Smarowanie smarem
-  Bez uszczelnienia
-  Nieosiowość statyczna
-  Nieosiowość dynamiczna