


**GE240-DO-2RS-C3**

Spherical plain bearing

High performance radial spherical plain bearing, requiring maintenance, sliding contact surface: steel/steel, DIN ISO 12240-1, dimension series E, sealed

High-performance:
For highest load rating and lifetime demands

Informacje techniczne

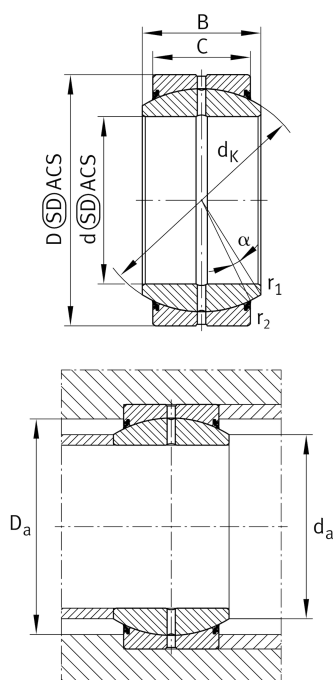

Twoja aktualna wersja produktu

Maintenance	Maintenance required	
Material	Steel	
Type of Seal	2RS	Lip seals on both sides
Radial internal clearance	C3 (Group 3)	Internal clearance larger than CN
Coating	Durotect M	Inner- and outer ring coated with Durotect M (Manganese Phosphate)

Main Dimensions & Performance Data

d	240 mm	Bore diameter bearing
D	340 mm	Outside diameter bearing
B	140 mm	Width inner ring
C _r	3.320.000 N	Basic dynamic load rating, radial
C _{0r}	12.800.000 N	Basic static load rating, radial
≈m	38,82 kg	Masa

Mounting dimensions

r _{1min}	1,1 mm	Edge Spacing
r _{2min}	1,1 mm	Edge Spacing
d _{a max}	265,3 mm	Connection measure Inner ring
D _{a min}	295 mm	Housing Connection Diameter



Dimensions

C	100 mm	Width Outer ring
d _K	300 mm	Ball diameter
α	8 °	Tilt angle
d _{OT}	0 mm	Bore diameter bearing, upper tolerance
d _{UT}	-0,03 mm	Bore diameter bearing, lower tolerance
D _{OT}	0 mm	Outside diameter, upper tolerance
D _{UT}	-0,04 mm	Outside diameter, lower tolerance
B _{OT}	0 mm	Width inner ring, upper tolerance
B _{UT}	-0,3 mm	Width inner ring, lower tolerance
C _{OT}	0 mm	Width outer ring, upper tolerance
C _{UT}	-0,8 mm	Width outer ring, lower tolerance
G _r	0,214 - 0,318	Radial Clearance
G _{rmax}	0,192 mm	Radial clearance, maximum
G _{rmin}	0,1 mm	Radial clearance, minimum

Temperature range

T _{min}	-30 °C	Operating temperature min.
T _{max}	130 °C	Operating temperature max.



Właściwości

-  Obciążenie promieniowe
-  Obciążenie osiowe jednokierunkowe
-  Obciążenie osiowe dwukierunkowe
-  Smarowanie smarem
-  Uszczelnienie dwustronne
-  Łożysko gabarytowe
-  Nieosiowość statyczna
-  Nieosiowość dynamiczna