


**GE40-LO**

## Spherical plain bearing

High performance Radial spherical plain bearing, requiring maintenance, sliding contact surface: steel/steel, DIN ISO 12240-1, dimension series W, cylindrical extensions on inner ring, open design

High-performance: For highest load rating and lifetime demands

## Informacje techniczne

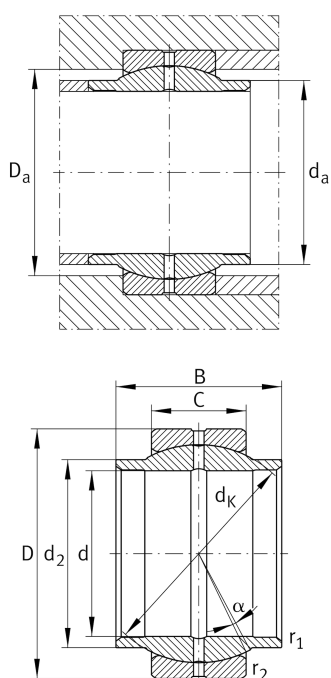

## Twoja aktualna wersja produktu

|                           |                      |                                                                    |
|---------------------------|----------------------|--------------------------------------------------------------------|
| Maintenance               | Maintenance required |                                                                    |
| Material                  | Steel                |                                                                    |
| Sealing                   | Without              |                                                                    |
| Radial internal clearance | CN (Group N)         | Normal internal clearance                                          |
| Coating                   | Durotect M           | Inner- and outer ring coated with Durotect M (Manganese Phosphate) |

## Main Dimensions &amp; Performance Data

|                 |           |                                   |
|-----------------|-----------|-----------------------------------|
| d               | 40 mm     | Bore diameter bearing             |
| D               | 62 mm     | Outside diameter bearing          |
| B               | 40 mm     | Width inner ring                  |
| C <sub>r</sub>  | 129.000 N | Basic dynamic load rating, radial |
| C <sub>0r</sub> | 496.000 N | Basic static load rating, radial  |
| ≈m              | 0,343 kg  | Masa                              |

## Mounting dimensions

|                    |        |                               |
|--------------------|--------|-------------------------------|
| r <sub>1</sub> min | 0,6 mm | Edge Spacing                  |
| r <sub>2</sub> min | 1 mm   | Edge Spacing                  |
| d <sub>a</sub> max | 46 mm  | Connection measure Inner ring |
| D <sub>a</sub> min | 51 mm  | Housing Connection Diameter   |



Dimensions

|                   |             |                                        |
|-------------------|-------------|----------------------------------------|
| C                 | 22 mm       | Width Outer ring                       |
| d <sub>K</sub>    | 53 mm       | Ball diameter                          |
| α                 | 4 °         | Tilt angle                             |
| d <sub>OT</sub>   | 0,025 mm    | Bore diameter bearing, upper tolerance |
| d <sub>UT</sub>   | 0 mm        | Bore diameter bearing, lower tolerance |
| D <sub>OT</sub>   | 0 mm        | Outside diameter, upper tolerance      |
| D <sub>UT</sub>   | -0,013 mm   | Outside diameter, lower tolerance      |
| B <sub>OT</sub>   | 0 mm        | Width inner ring, upper tolerance      |
| B <sub>UT</sub>   | -0,25 mm    | Width inner ring, lower tolerance      |
| C <sub>OT</sub>   | 0 mm        | Width outer ring, upper tolerance      |
| C <sub>UT</sub>   | -0,3 mm     | Width outer ring, lower tolerance      |
| G <sub>r</sub>    | 0,06 - 0,12 | Radial Clearance                       |
| G <sub>rmax</sub> | 0,12 mm     | Radial clearance, maximum              |
| G <sub>rmin</sub> | 0,06 mm     | Radial clearance, minimum              |

Temperature range

|                  |        |                            |
|------------------|--------|----------------------------|
| T <sub>min</sub> | -60 °C | Operating temperature min. |
| T <sub>max</sub> | 200 °C | Operating temperature max. |

Właściwości

-  Obciążenie promieniowe
-  Obciążenie osiowe jednokierunkowe
-  Obciążenie osiowe dwukierunkowe
-  Smarowanie smarem
-  Bez uszczelnienia
-  Nieosiowość statyczna
-  Nieosiowość dynamiczna