



IMAGE
COMING SOON




GLCTE20-FA125 [↗](#)

Flanged housing unit

Flanged housing unit GLCTE...-FA125

Informacje techniczne

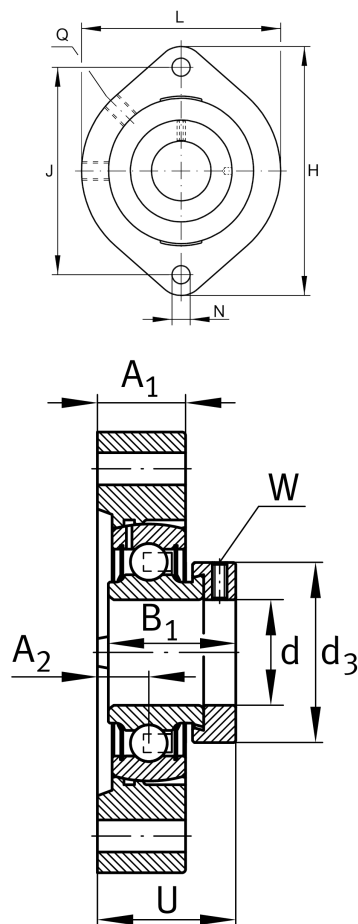

Twoja aktualna wersja produktu

Material	GG	Grey cast iron
Manufacturing instruction	FA125	Unit with Corrotect coating, corrosion-resistant

Main Dimensions & Performance Data

d	20 mm	Bore diameter
L	66,5 mm	Flange width
H	90,5 mm	Height flange
U	33 mm	Total height unit
C _r	13.600 N	Basic dynamic load rating, radial
C _{0r}	6.600 N	Basic static load rating, radial
≈m	0,41 kg	Masa

Mounting dimensions

J	71,4 mm	Distance fixing bore
N	9 mm	Fixing bore
W	3 mm	Width across flats
n	2	Number of screwing holes



Dimensions

A ₁	17 mm	Thickness of flange
A ₂	9,5 mm	Distance raceway
B ₁	31 mm	Locking collar total width
Q	M6	Connection thread for lubrication
d ₃	33 mm	Outside diameter eccentric locking collar

Additional information

1	Number of housings
GEHGLCTE04-GG-FA125.1	Housing
GRAE20-XL-NPP-B-FA125.5	Bearing designation

Temperature range

T _{min}	-20 °C	Operating temperature min.
T _{max}	120 °C	Operating temperature max.