

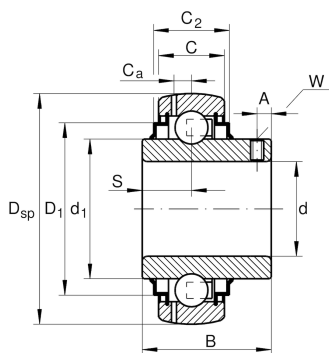
**GYE60-XL-KRR-B**

Radial insert ball bearing

Radial insert ball bearings GYE...-KRR-B,
spherical outer ring, location by grub screws,
R seals on both sides

X-life

Informacje techniczne

**Main Dimensions & Performance Data**

d	60 mm	Bore diameter
D SP	110 mm	Outside diameter
B	65,1 mm	Width
C 0r	36.000 N	Basic static load rating, radial
C ur	1.870 N	Fatigue load limit, radial
C r	56.000 N	Basic dynamic load rating, radial
≈m	1,389 kg	Masa

Dimensions

C	24 mm	Width, outer ring
C 2	29 mm	Sealing total width
S	25,4 mm	Distance raceway
d 1	76,5 mm	Rib diameter inner ring
D 1	94,5 mm	Outside diameter seal
C a	7,2 mm	Distance to lubrication hole
A	10,1 mm	Distance thread
W	5 mm	Width of flats

Calculation factors

f 0	14,3	Calculation factor
-----	------	--------------------



Właściwości

-  Obciążenie promieniowe
-  Obciążenie osiowe jednokierunkowe
-  Obciążenie osiowe dwukierunkowe
-  Smarowanie dożywotnie, bezobsługowe
-  Smarowanie smarem
-  Uszczelnienie dwustronne
-  Nieosiowość statyczna