


FAG

HC7000-E-T-P4S-UL

High speed spindle bearing

High speed spindle bearing HC70...-E, adjusted, in pairs or sets, contact angle  $\alpha = 25^\circ$ , with ceramic balls, restricted tolerances

Informacje techniczne





Twoja aktualna wersja produktu

|                         |         |                                                                  |
|-------------------------|---------|------------------------------------------------------------------|
| Preload class           | L       | Preload light                                                    |
| Contact angle           | E       | Contact angle $25^\circ$                                         |
| Type of Seal            | Without | Not sealed                                                       |
| Cage                    | T       | Laminated fabric cage                                            |
| Tolerance class         | P4S     | Tolerance class P4S, FAG standard better than P4 to ISO 492:2023 |
| Arrangement bearing set | U       | Single bearing                                                   |

Main Dimensions & Performance Data

|                        |               |                                       |
|------------------------|---------------|---------------------------------------|
| d                      | 10 mm         | Bore diameter                         |
| D                      | 26 mm         | Outside diameter                      |
| B                      | 8 mm          | Width                                 |
| $C_r$                  | 2.360 N       | Basic dynamic load rating, radial     |
| $C_{0r}$               | 860 N         | Basic static load rating, radial      |
| $C_{ur}$               | 69 N          | Fatigue load limit, radial            |
| $n_{G \text{ Grease}}$ | 110.000 1/min | Limiting speed for grease lubrication |
| $n_{G \text{ Oil}}$    | 160.000 1/min | Limiting speed for oil lubrication    |
| $\approx m$            | 20,8 g        | Masa                                  |

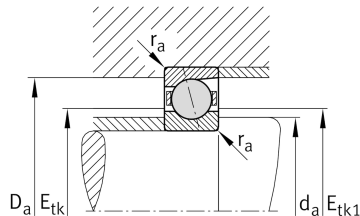



Mounting dimensions

|                      |         |                                                   |
|----------------------|---------|---------------------------------------------------|
| d <sub>a</sub>       | 14 mm   | Diameter shaft shoulder                           |
| d <sub>a</sub>       | h12     | Diameter shaft shoulder clearance                 |
| D <sub>a</sub>       | 22 mm   | Shoulder diameter outer ring                      |
| D <sub>a</sub>       | H12     | Shoulder diameter outer ring clearance            |
| r <sub>a</sub> max   | 0,3 mm  | Maximum recess radius                             |
| r <sub>a1</sub> max  | 0,1 mm  | Maximum recess radius                             |
| E <sub>tk</sub> min  | 16,4 mm | Minimum diameter injection pitch                  |
| E <sub>tk</sub> max  | 16,9 mm | Maximum diameter injection pitch                  |
| E <sub>tk1</sub> min | 15,3 mm | Minimum diameter injection pitch                  |
| E <sub>tk1</sub> max | 16,9 mm | Maximum diameter injection pitch                  |
| a                    | 8,2 mm  | Distance between the apexes of the pressure cones |

Dimensions

|                    |        |                           |
|--------------------|--------|---------------------------|
| r <sub>min</sub>   | 0,3 mm | Minimum chamfer dimension |
| r <sub>1 min</sub> | 0,3 mm | Minimum chamfer dimension |
| α                  | 25 °   | Contact angle             |

Temperature range

|                  |        |                            |
|------------------|--------|----------------------------|
| T <sub>min</sub> | -30 °C | Operating temperature min. |
| T <sub>max</sub> | 100 °C | Operating temperature max. |



Additional information

|           |         |                       |
|-----------|---------|-----------------------|
| $F_{VL}$  | 10 N    | Preload force light   |
| $F_{VM}$  | 31 N    | Preload force medium  |
| $F_{VH}$  | 62 N    | Preload force heavy   |
| $K_{aEL}$ | 30 N    | Lift-off force light  |
| $K_{aEM}$ | 91 N    | Lift-off force medium |
| $K_{aEH}$ | 185 N   | Lift-off force heavy  |
| $c_{aL}$  | 27 N/μm | Axial rigidity light  |
| $c_{aM}$  | 40 N/μm | Axial rigidity medium |
| $c_{aH}$  | 51 N/μm | Axial rigidity heavy  |

Właściwości

- 

Obciążenie promieniowe
- 

Obciążenie osiowe jednokierunkowe
- 

Smarowanie smarem
- 

Smarowanie olejem
- 

Bez uszczelnienia