


HFL0615 [↗](#)

Drawn cup roller clutch

Drawn cup roller clutch HFL, with bearing

Informacje techniczne

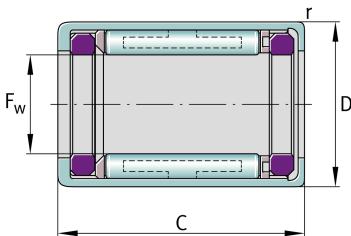

Twoja aktualna wersja produktu

Lubricant	L564	Grease (L564/standart specific - dynamic)
Coating	Without	
Shape of outer surface	Without	Smooth outside surface
Spring design	Standard	Steel pressure springs

Main Dimensions & Performance Data

F_w	6 mm	Under roller diameter
D	10 mm	Outside diameter
C	15 mm	Width, outer ring
r_{min}	0,3 mm	Minimum chamfer dimension
$(Fr \cdot n)_{max}$	18.000 N/min	Limiting load
$F_{r max}$	110 N	Permissible radial load
n_{GA}	13.000 1/min	Limiting speed for rotating outer ring
n_{GW}	23.000 1/min	Limiting speed for rotating shaft

$\approx m$ 3,815 g Masa

Mounting dimensions

$M_{d per}$	1,76 Nm	Permissible torque
-------------	---------	--------------------



Temperature range

T_{min}	-10 °C	Operating temperature min.
T_{max}	70 °C	Operating temperature max.

Właściwości



Obciążenie promieniowe



Smarowanie smarem



Bez uszczelnienia



Mała przestrzeń zabudowy



Sprzęgło jednokierunkowe