


HFL1826

Drawn cup roller clutch

Drawn cup roller clutch HFL, with bearing

Informacje techniczne

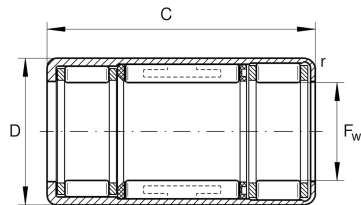

Twoja aktualna wersja produktu

Lubricant	L564	Grease (L564/standart specific - dynamic)
Coating	Without	
Shape of outer surface	Without	Smooth outside surface
Spring design	Standard	Steel pressure springs

Main Dimensions & Performance Data

F_w	18 mm	Under roller diameter
D	24 mm	Outside diameter
C	26 mm	Width, outer ring
C_r	8.000 N	Basic dynamic load rating, radial
C_{0r}	10.200 N	Basic static load rating, radial
r_{min}	0,3 mm	Minimum chamfer dimension
C_{ur}	1.440 N	Fatigue load limit, radial
n_{GA}	7.500 1/min	Limiting speed for rotating outer ring
n_{GW}	7.500 1/min	Limiting speed for rotating shaft
$\approx m$	24,8 g	Masa

Mounting dimensions

$M_{d\ per}$	24,1 Nm	Permissible torque
--------------	---------	--------------------



Temperature range

$T_{\min}$	-10 °C	Operating temperature min.
$T_{\max}$	70 °C	Operating temperature max.

Właściwości



Obciążenie promieniowe



Smarowanie smarem



Bez uszczelnienia



Mała przestrzeń zabudowy



Sprzęgło jednokierunkowe