
**FAG****HS71909-E-T-P4S-UL**

High speed spindle bearing

High speed spindle bearing HS719...-E,
adjusted, in pairs or sets, contact angle $\alpha = 25^\circ$, restricted tolerances

Informacje techniczne

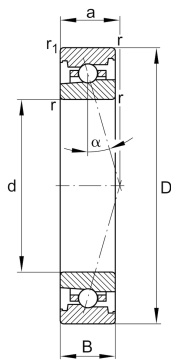


Twoja aktualna wersja produktu

Contact angle	E	Contact angle 25°
Sealing	Without	Not sealed
Cage	T	Laminated fabric cage
Tolerance class	P4S	Tolerance class P4S, FAG standard better than P4 to ISO 492:2023
Arrangement bearing set	U	Single bearing
Preload class	L	Preload light

Main Dimensions & Performance Data

d	45 mm	Bore diameter
D	68 mm	Outside diameter
B	12 mm	Width
C_r	9.100 N	Basic dynamic load rating, radial
C_{0r}	5.600 N	Basic static load rating, radial
C_{ur}	600 N	Fatigue load limit, radial
n_G Grease	26.000 1/min	Limiting speed for grease lubrication
n_G Oil	40.000 1/min	Limiting speed for oil lubrication
n_G	40.000 1/min	Limiting speed
$\approx m$	0,13 kg	Masa

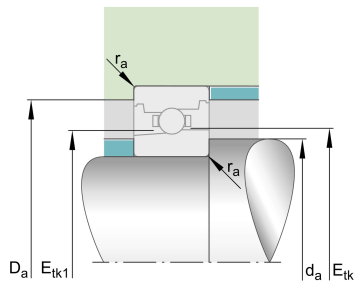



Mounting dimensions

d_a	50 mm	Diameter shaft shoulder
d_a	h12	Diameter shaft shoulder clearance
D_a	63,5 mm	Shoulder diameter outer ring
D_a	H12	Shoulder diameter outer ring clearance
$r_{a\ max}$	0,6 mm	Maximum recess radius
$r_{a1\ max}$	0,15 mm	Maximum recess radius
$E_{tk\ min}$	53,7 mm	Minimum diameter injection pitch
$E_{tk\ max}$	54,7 mm	Maximum diameter injection pitch
$E_{tk1\ min}$	51,9 mm	Minimum diameter injection pitch
$E_{tk1\ max}$	54,7 mm	Maximum diameter injection pitch
a	19,2 mm	Distance between the apexes of the pressure cones

Dimensions

r_{min}	0,6 mm	Minimum chamfer dimension
$r_{1\ min}$	0,6 mm	Minimum chamfer dimension
α	25 °	Contact angle

Temperature range

T_{min}	-30 °C	Operating temperature min.
T_{max}	100 °C	Operating temperature max.



Additional information

F_{VL}	55 N	Preload force light
F_{VM}	164 N	Preload force medium
F_{VH}	328 N	Preload force heavy
K_{aEL}	158 N	Lift-off force light
K_{aEM}	482 N	Lift-off force medium
K_{aEH}	984 N	Lift-off force heavy
c_{aL}	77 N/ μ m	Axial rigidity light
c_{aM}	115 N/ μ m	Axial rigidity medium
c_{aH}	150 N/ μ m	Axial rigidity heavy

Właściwości

- 

Obciążenie promieniowe
- 

Obciążenie osiowe jednokierunkowe
- 

Smarowanie smarem
- 

Smarowanie olejem
- 

Bez uszczelnienia