






FAG

HSS71924-C-T-P4S-UL

High speed spindle bearing

High speed spindle bearing HSS719...-C, adjusted, in pairs or sets, contact angle $\alpha = 15^\circ$, lip seals on both sides, non-contact, restricted tolerances

Informacje techniczne

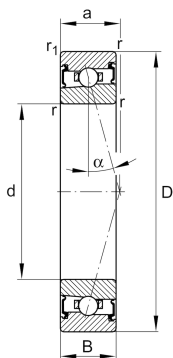

Twoja aktualna wersja produktu

Contact angle	C	Contact angle 15°
Type of Seal	2RSD	Non-contact sealed on both sides and greased "for life"
Cage	T	Laminated fabric cage
Tolerance class	P4S	Tolerance class P4S, FAG standard better than P4 to ISO 492:2023
Arrangement bearing set	U	Single bearing
Preload class	L	Preload light
Lubricant	GA21	Grease for super precision bearings, standard

Main Dimensions & Performance Data

d	120 mm	Bore diameter
D	165 mm	Outside diameter
B	22 mm	Width
C _r	35.500 N	Basic dynamic load rating, radial
C _{0r}	32.000 N	Basic static load rating, radial
C _{ur}	2.850 N	Fatigue load limit, radial
n _{G Grease}	11.000 1/min	Limiting speed for grease lubrication
n _G	17.000 1/min	Limiting speed
≈m	1,27 kg	Masa



Mounting dimensions

d_a	128 mm	Diameter shaft shoulder
d_a	h12	Diameter shaft shoulder clearance
D_a	157 mm	Shoulder diameter outer ring
D_a	H12	Shoulder diameter outer ring clearance
$r_{a\ max}$	0,6 mm	Maximum recess radius
$r_{a1\ max}$	0,6 mm	Maximum recess radius
a	30,1 mm	Distance between the apexes of the pressure cones

Dimensions

$r_{\min}$	1,1 mm	Minimum chamfer dimension
$r_{1\ min}$	1,1 mm	Minimum chamfer dimension
α	15 °	Contact angle

Temperature range

$T_{\min}$	-30 °C	Operating temperature min.
$T_{\max}$	80 °C	Operating temperature max.

Additional information

F_{VL}	122 N	Preload force light
F_{VM}	367 N	Preload force medium
F_{VH}	734 N	Preload force heavy
K_{aEL}	363 N	Lift-off force light
K_{aEM}	1.137 N	Lift-off force medium
K_{aEH}	2.362 N	Lift-off force heavy
c_{aL}	77 N/μm	Axial rigidity light
c_{aM}	119 N/μm	Axial rigidity medium
c_{aH}	162 N/μm	Axial rigidity heavy



Właściwości



Obciążenie promieniowe



Obciążenie osiowe jednokierunkowe



Smarowanie dożywotnie, bezobsługowe



Smarowanie smarem



Uszczelnienie dwustronne