



K12X15X20-ZW-TV/0-7

Needle roller cage assembly

Needle roller cage assembly K..-ZW-TV, two-row

Informacje techniczne

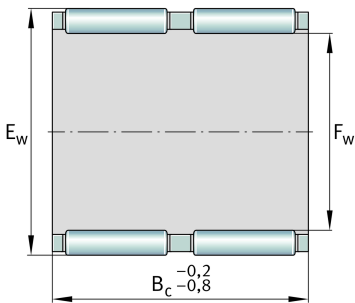

Twoja aktualna wersja produktu

Cage	TV	Plastic Cage made from PA66
Number of rows	ZW	Double-row design

Main Dimensions & Performance Data

F _w	12 mm	Inner diameter of needle roller complement
E _w	15 mm	Outside diameter of needle roller complement
B _c	20 mm	Width
C _r	8.400 N	Basic dynamic load rating, radial
C _{0r}	12.200 N	Basic static load rating, radial
C _{ur}	1.680 N	Fatigue load limit, radial
n _G	27.000 1/min	Limiting speed
n _{gr}	21.500 1/min	Reference speed
≈m	3,6 g	Masa

Temperature range

T _{min}	-20 °C	Operating temperature min.
T _{max}	120 °C	Operating temperature max.



Właściwości



Obciążenie promieniowe



Smarowanie smarem



Smarowanie olejem



Bez uszczelnienia



Mala przestrzeń zabudowy