



K32X40X42-ZW-TV

Needle roller cage assembly

Needle roller cage assembly K.-ZW-TV, two-row

Informacje techniczne

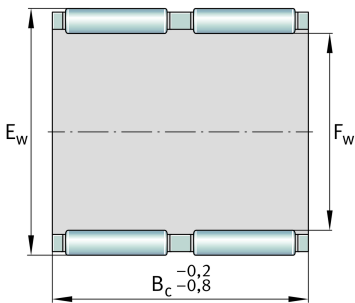

Twoja aktualna wersja produktu

Cage	TV	Plastic Cage made from PA66
Number of rows	ZW	Double-row design

Main Dimensions & Performance Data

F _w	32 mm	Inner diameter of needle roller complement
E _w	40 mm	Outside diameter of needle roller complement
B _c	42 mm	Width
C _r	50.000 N	Basic dynamic load rating, radial
C _{0r}	84.000 N	Basic static load rating, radial
C _{ur}	10.700 N	Fatigue load limit, radial
n _G	13.600 1/min	Limiting speed
n _{gr}	7.800 1/min	Reference speed
≈m	63,23 g	Masa

Temperature range

T _{min}	-20 °C	Operating temperature min.
T _{max}	120 °C	Operating temperature max.



Właściwości



Obciążenie promieniowe



Smarowanie smarem



Smarowanie olejem



Bez uszczelnienia



Mala przestrzeń zabudowy