



K35X40X26-ZW-A/0-7

Needle roller cage assembly

Needle roller cage assembly K..-ZW, two-row

Informacje techniczne

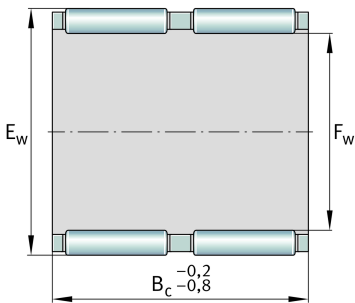

Twoja aktualna wersja produktu

Cage	JN	Steel sheet metal
Number of rows	ZW	Double-row design

Main Dimensions & Performance Data

F _w	35 mm	Inner diameter of needle roller complement
E _w	40 mm	Outside diameter of needle roller complement
B _c	26 mm	Width
C _r	25.500 N	Basic dynamic load rating, radial
C _{0r}	50.000 N	Basic static load rating, radial
C _{ur}	6.400 N	Fatigue load limit, radial
n _G	13.100 1/min	Limiting speed
n _{gr}	7.700 1/min	Reference speed
≈m	41,4 g	Masa

Temperature range

T _{min}	-30 °C	Operating temperature min.
T _{max}	140 °C	Operating temperature max.



Właściwości



Obciążenie promieniowe



Smarowanie smarem



Smarowanie olejem



Bez uszczelnienia



Mala przestrzeń zabudowy