



K58X65X36-ZW [🔗](#)

Needle roller cage assembly

Needle roller cage assembly K..-ZW, two-row

Informacje techniczne

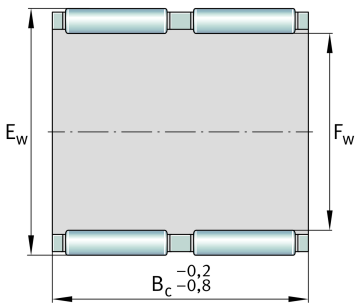

Twoja aktualna wersja produktu

Cage	JN	Steel sheet metal
Number of rows	ZW	Double-row design

Main Dimensions & Performance Data

F _w	58 mm	Inner diameter of needle roller complement
E _w	65 mm	Outside diameter of needle roller complement
B _c	36 mm	Width
C _r	49.000 N	Basic dynamic load rating, radial
C _{0r}	107.000 N	Basic static load rating, radial
C _{ur}	14.900 N	Fatigue load limit, radial
n _G	8.000 1/min	Limiting speed
n _{gr}	5.100 1/min	Reference speed
≈m	0,124 kg	Masa

Temperature range

T _{min}	-30 °C	Operating temperature min.
T _{max}	140 °C	Operating temperature max.



Właściwości



Obciążenie promieniowe



Smarowanie smarem



Smarowanie olejem



Bez uszczelnienia



Mala przestrzeń zabudowy