


KFB30-B-PP-AS

Linear Ball Bearing and Housing Unit

Linear ball bearing and housing unit; with flange, sealed, greased, with relubrication facility; corrosion-resistant design possible

Informacje techniczne

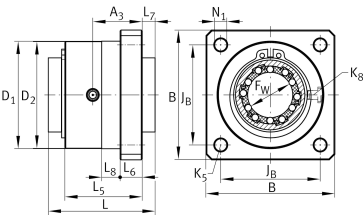

Twoja aktualna wersja produktu

|                       |    |
|-----------------------|----|
| Size                  | 30 |
| Seal                  | PP |
| Relubrication feature | AS |

Technical data

|    |         |           |
|----|---------|-----------|
|    | 6       | Ball rows |
| ≈m | 0,62 kg | Masa      |

Main Dimensions & Performance Data

|                    |            |                             |
|--------------------|------------|-----------------------------|
| F <sub>W</sub>     | 30 mm      | Diameter of ball complement |
| Tol F <sub>W</sub> | + 0,011 mm | Upper tolerance             |
| Tol F <sub>W</sub> | - 0,001 mm | Lower tolerance             |
| L                  | 68 mm      | Length                      |
| B                  | 80 mm      | Width                       |
| C                  | 3.600 N    | Load capacity dyn. C        |
| C <sub>0</sub>     | 2.850 N    | Load capacity stat. C0      |



Mounting dimensions

|         |          |                    |
|---------|----------|--------------------|
| L 5     | 50 mm    |                    |
| L 6     | 14 mm    | Thickness          |
| L 7     | 8 mm     |                    |
| A 3     | 26 mm    |                    |
| N 1     | 9 mm     | Diameter           |
| K 5     | M8       |                    |
| D 1     | 65,5 mm  | Diameter           |
| Tol D 1 | + 0,2 mm | Upper tolerance    |
| D 2     | 66 mm    | Diameter           |
| Tol D 2 | g7       | Upper tolerance    |
| J B     | 60 mm    |                    |
| L 8     | 10 mm    |                    |
| K 8     | NIPA1    | Lubrication nipple |