


KGB20-PP-AS

Linear Ball Bearing and Housing Unit

Linear ball bearing and housing unit; sealed, greased, with relubrication facility; corrosion-resistant design possible

Informacje techniczne

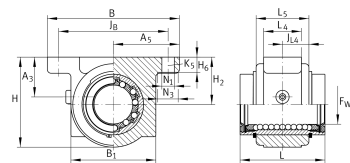

Twoja aktualna wersja produktu

Size	20
Seal	PP
Relubrication feature	AS

Technical data

	6	Ball rows
≈m	0,3 kg	Masa

Main Dimensions & Performance Data

F _W	20 mm	Diameter of ball complement
Tol F _W	+ 0,009 mm	Upper tolerance
Tol F _W	- 0,001 mm	Lower tolerance
H	47,5 mm	Height
L	45 mm	Length
Tol L	h12	Tolerance
B	70 mm	Width
C	1.570 N	Load capacity dyn.
C ₀	1.230 N	Load capacity stat.



Mounting dimensions

J B	58 mm	
Tol J B	+ 0,15 mm	Upper tolerance
Tol J B	- 0,15 mm	Lower tolerance
B 1	45 mm	
A 5	35 mm	
Tol A 5	+ 0,02 mm	Upper tolerance
Tol A 5	- 0,02 mm	Lower tolerance
L 4	20 mm	
L 5	28 mm	Length of Shaft Support Block without drive System
J L 4	14 mm	Distance
H 2	25 mm	Center height
Tol H 2	+ 0,015 mm	Upper tolerance
Tol H 2	- 0,015 mm	Lower tolerance
A 3	21 mm	
H 6	8 mm	
N 1	6,6 mm	
N 3	11 mm	
K 5	M6	
K 8	NIPA1	Lubrication nipple