

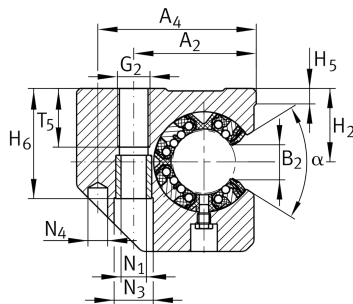


KGSCS20-PP-AS

Linear Ball Bearing and Housing Unit

Linear ball bearing and housing unit; with self-aligning linear ball bearing, open slotted design, sealed, greased, with relubrication facility

Informacje techniczne



Twoja aktualna wersja produktu


Size	20
Seal	PP
Relubrication feature	AS

Technical data

	6	Ball rows
≈m	0,36 kg	Masa

Main Dimensions & Performance Data

F _w	20 mm	Diameter of ball complement
H	60 mm	Height
L	47 mm	Length
B	60 mm	Width
C _{max}	2.200 N	Load capacity dyn.
C _{0 max}	2.310 N	Load capacity stat. C ₀ max



Mounting dimensions

A 2	39 mm	
Tol A 2	+ 0,15 mm	Upper tolerance
Tol A 2	- 0,15 mm	Lower tolerance
A 4	51 mm	
A 5	17 mm	
Tol A 5	+ 0,01 mm	Upper tolerance
Tol A 5	- 0,01 mm	Lower tolerance
B 2	10 mm	
J L	30 mm	Distance
Tol J L	+ 0,15 mm	Upper tolerance
Tol J L	- 0,15 mm	Lower tolerance
L 6	36 mm	Distance
H 2	30 mm	Center height
Tol H 2	+ 0,008 mm	Upper tolerance
Tol H 2	- 0,016 mm	Lower tolerance
H 4	37,5 mm	
H 5	8,3 mm	
T 5	18 mm	Mounting Dimension
H 6	42,6 mm	
G 2	M10	
N 1	8,4 mm	
N 4	6 mm	
N 3	15 mm	
K 5	M8	
K 8	NIP4MZ	Lubrication nipple
W	2,5 mm	Width across flats
α	55 °	Angle