

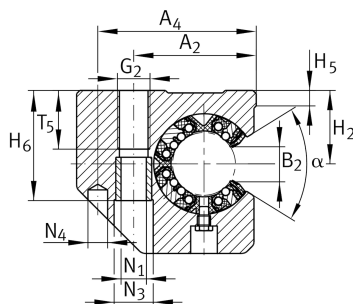


KGSCS40-PP-AS

Linear Ball Bearing and Housing Unit

Linear ball bearing and housing unit; with self-aligning linear ball bearing, open slotted design, sealed, greased, with relubrication facility

Informacje techniczne



Twoja aktualna wersja produktu


Size	40
Seal	PP
Relubrication feature	AS

Technical data

	6	Ball rows
≈m	1,9 kg	Masa

Main Dimensions & Performance Data

F _w	40 mm	Diameter of ball complement
H	100 mm	Height
L	80 mm	Length
B	110 mm	Width
C _{max}	10.200 N	Load capacity dyn.
C _{0 max}	9.600 N	Load capacity stat. C ₀ max



Mounting dimensions

A 2	75 mm	
Tol A 2	+ 0,15 mm	Upper tolerance
Tol A 2	- 0,15 mm	Lower tolerance
A 4	97 mm	
A 5	32 mm	
Tol A 5	+ 0,01 mm	Upper tolerance
Tol A 5	- 0,01 mm	Lower tolerance
B 2	18,2 mm	
J L	48 mm	Distance
Tol J L	+ 0,15 mm	Upper tolerance
Tol J L	- 0,15 mm	Lower tolerance
L 6	60 mm	Distance
H 2	45 mm	Center height
Tol H 2	+ 0,008 mm	Upper tolerance
Tol H 2	- 0,016 mm	Lower tolerance
H 4	60 mm	
H 5	9,5 mm	
T 5	36 mm	Mounting Dimension
H 6	67,6 mm	
G 2	M20	
N 1	15,5 mm	
N 4	12 mm	
N 3	24 mm	
K 5	M14	
K 8	NIP5MZ	Lubrication nipple
W	4 mm	Width across flats
α	56 °	Angle