

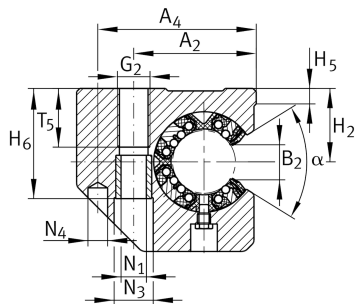


KGSCS50-PP-AS

Linear Ball Bearing and Housing Unit

Linear ball bearing and housing unit; with self-aligning linear ball bearing, open slotted design, sealed, greased, with relubrication facility

Informacje techniczne



Twoja aktualna wersja produktu


Size	50
Seal	PP
Relubrication feature	AS

Technical data

	6	Ball rows
≈m	3 kg	Masa

Main Dimensions & Performance Data

F _w	50 mm	Diameter of ball complement
H	115 mm	Height
L	100 mm	Length
B	127 mm	Width
C _{max}	15.100 N	Load capacity dyn.
C _{0 max}	13.900 N	Load capacity stat. C0max



Mounting dimensions

A 2	88 mm	
Tol A 2	+ 0,15 mm	Upper tolerance
Tol A 2	- 0,15 mm	Lower tolerance
A 4	109 mm	
A 5	38 mm	
Tol A 5	+ 0,01 mm	Upper tolerance
Tol A 5	- 0,01 mm	Lower tolerance
B 2	22,7 mm	
J L	62 mm	Distance
Tol J L	+ 0,15 mm	Upper tolerance
Tol J L	- 0,15 mm	Lower tolerance
L 6	80 mm	Distance
H 2	50 mm	Center height
Tol H 2	+ 0,008 mm	Upper tolerance
Tol H 2	- 0,016 mm	Lower tolerance
H 4	70 mm	
H 5	8,6 mm	
T 5	36 mm	Mounting Dimension
H 6	78,8 mm	
G 2	M20	
N 1	17,5 mm	
N 4	12 mm	
N 3	26 mm	
K 5	M16	
K 8	NIP6MZ	Lubrication nipple
W	5 mm	Width across flats
α	54 °	Angle