




KGSNS20-PP-AS

Linear Ball Bearing and Housing Unit

Linear ball bearing and housing unit; with self-aligning linear ball bearing, slotted design, sealed, greased, with relubrication facility

Informacje techniczne



Twoja aktualna wersja produktu

Size 20

Seal PP

Relubrication feature AS

Technical data

8 Ball rows

≈m 0,36 kg Masa

Main Dimensions & Performance Data

F w 20 mm Diameter of ball complement


H 50 mm Height

L 45 mm Length

B 60 mm Width

C max 2.200 N Load capacity dyn.

C 0 max 2.310 N Load capacity stat.

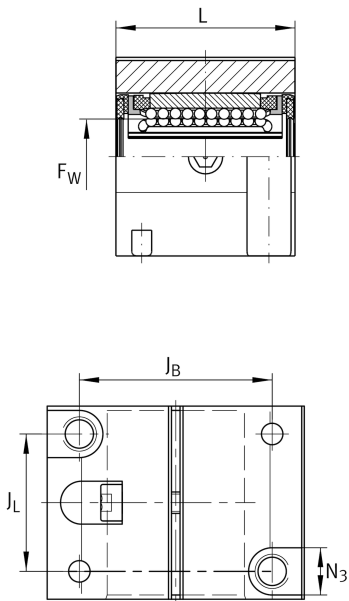

Mounting dimensions

J _B	45 mm	
B ₁	44 mm	
A ₅	30 mm	
Tol A ₅	+ 0,01 mm	Upper tolerance
Tol A ₅	- 0,01 mm	Lower tolerance
J _L	32 mm	Distance
Tol J _L	+ 0,15 mm	Upper tolerance
H ₂	25 mm	Center height
H ₄	34,1 mm	
H ₅	7,4 mm	
T ₅	18 mm	Mounting Dimension
H ₆	24 mm	Mounting Dimension
G ₂	M8	
N ₁	6,6 mm	Mounting Dimension
N ₄	5 mm	
N ₃	11 mm	Mounting Dimension
K ₅	M6	
K ₈	NIP4MZ	Lubrication nipple
W	4 mm	Width across flats