




KGSNS50-PP-AS

Linear Ball Bearing and Housing Unit

Linear ball bearing and housing unit; with self-aligning linear ball bearing, slotted design, sealed, greased, with relubrication facility

Informacje techniczne



Twoja aktualna wersja produktu

Size 50

Seal PP

Relubrication feature AS

Technical data

8 Ball rows

≈m 2,76 kg Masa

Main Dimensions & Performance Data

F w 50 mm Diameter of ball complement


H 105 mm Height

L 100 mm Length

B 132 mm Width

C max 15.100 N Load capacity dyn.

C 0 max 13.900 N Load capacity stat.

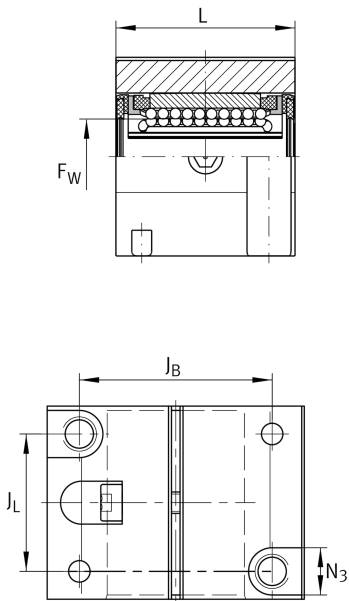

Mounting dimensions

J _B	108 mm	
B ₁	90 mm	
A ₅	66 mm	
Tol A ₅	+ 0,01 mm	Upper tolerance
Tol A ₅	- 0,01 mm	Lower tolerance
J _L	50 mm	Distance
Tol J _L	+ 0,15 mm	Upper tolerance
H ₂	50 mm	Center height
H ₄	62 mm	
H ₅	10,6 mm	
T ₅	35 mm	Mounting Dimension
H ₆	49 mm	Mounting Dimension
G ₂	M16	
N ₁	13,5 mm	Mounting Dimension
N ₄	10 mm	
N ₃	20 mm	Mounting Dimension
K ₅	M12	
K ₈	NIP6MZ	Lubrication nipple
W	8 mm	Width across flats