




FAG

KL44643-L44610

Tapered roller bearing

Tapered roller bearings K-Series, in inch sizes, separable

Informacje techniczne

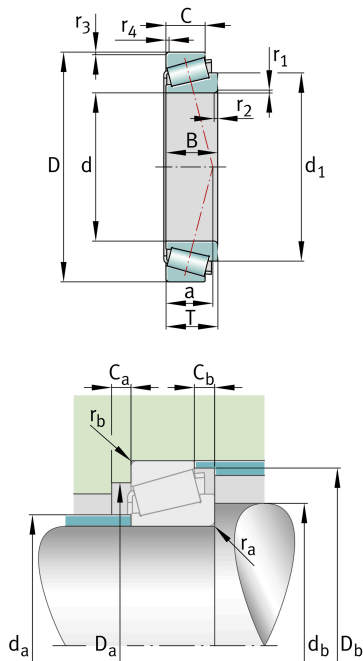

Twoja aktualna wersja produktu

Tolerance class	ABMA4	Class 4 (ANSI/ABMA 19.2:2013)
Heat treatment	Standard	
Cage	Standard	Sheet steel cage, window cage, roller-guided
Quality level	Standard	
Number of rows	1	Single-row design

Main Dimensions & Performance Data

d	25,4 mm	Bore diameter
D	50,292 mm	Outside diameter
B	14,732 mm	Width, inner ring
C	10,668 mm	Width, outer ring
T	14,224 mm	Width, total
C _r	26.000 N	Basic dynamic load rating, radial
C _{0r}	29.500 N	Basic static load rating, radial
C _{ur}	3.200 N	Fatigue load limit, radial
n _G	15.200 1/min	Limiting speed
n _{gr}	8.500 1/min	Thermal speed rating
≈m	130 g	Masa



Mounting dimensions

$d_{a \max}$	30 mm	Maximum diameter of shaft shoulder
$d_{b \min}$	32 mm	Minimum diameter of shaft shoulder
$D_{a \min}$	44,5 mm	Minimum diameter of housing shoulder
$D_{a \max}$	44 mm	Maximum diameter of housing shoulder
$D_{b \min}$	47 mm	Minimum diameter of housing shoulder
$C_{a \min}$	3 mm	Minimum axial space
$C_{b \min}$	3,5 mm	Minimum axial space
$r_{a \max}$	1,3 mm	Maximum fillet radius of shaft
$r_{b \max}$	1,3 mm	Maximum fillet radius of housing

Dimensions

$r_{1, 2 \min}$	1,3 mm	Minimum chamfer dimension of inner ring back face
$r_{3, 4 \min}$	1,3 mm	Minimum chamfer dimension of outer ring back face
a	11 mm	Distance between the apexes of the pressure cones
d_1	39,5 mm	Guidance rib diameter of inner ring

Temperature range

$T_{\min}$	-30 °C	Operating temperature min.
$T_{\max}$	120 °C	Operating temperature max.

Calculation factors

e	0,37	Limiting value of F_a/F_r for the applicability of diff. Values of factors X and Y
Y	1,6	Dynamic axial load factor
Y_0	0,88	Static axial load factor



Właściwości

-  Obciążenie promieniowe
-  Obciążenie osiowe jednokierunkowe
-  Smarowanie smarem
-  Smarowanie olejem
-  Bez uszczelnienia