




**KSR16-L0-06-10-20-08**

Roller chain idler sprocket unit

Roller chain idler sprocket units KSR...L0,  
sprocket made from steel or sintered iron

Informacje techniczne

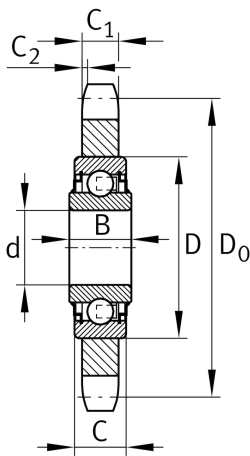

Main Dimensions & Performance Data

|     |         |                                 |
|-----|---------|---------------------------------|
| d   | 16,2 mm | Bore diameter                   |
| d   | 0,1 mm  | Upper tolerance                 |
| d   | 0 mm    | Lower tolerance                 |
| C 1 | 5,2 mm  | Thickness of sprocket           |
| D 0 | 60,9 mm | Pitch circle diameter (gearing) |
| D k | 65 mm   | Tip diameter (gearing)          |
| ≈m  | 0,13 kg | Masa                            |

Mounting dimensions

|   |          |                 |
|---|----------|-----------------|
| p | 9,525 mm | Tooth set       |
| z | 20       | Number of teeth |
| x |          | ISO chain       |

Dimensions

|     |         |                   |
|-----|---------|-------------------|
| C 2 | 0,8 mm  | Chamfer width     |
| D   | 40 mm   | Outside diameter  |
| C   | 12 mm   | Width, outer ring |
| B   | 18,3 mm | Width inner ring  |