


KTB20-B-PP-AS

Linear Ball Bearing and Housing Unit

Linear ball bearing and housing unit; sealed, greased, with relubrication facility; corrosion-resistant design possible

Informacje techniczne

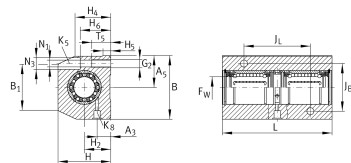

Twoja aktualna wersja produktu

|                       |    |
|-----------------------|----|
| Size                  | 20 |
| Seal                  | PP |
| Relubrication feature | AS |

Main Dimensions & Performance Data

|                    |            |                             |
|--------------------|------------|-----------------------------|
| F <sub>W</sub>     | 20 mm      | Diameter of ball complement |
| Tol F <sub>W</sub> | + 0,009 mm | Upper tolerance             |
| Tol F <sub>W</sub> | - 0,001 mm | Lower tolerance             |
| H                  | 50 mm      | Height                      |
| L                  | 104 mm     | Length                      |
| B                  | 60 mm      | Width                       |
| C                  | 2.550 N    | Load capacity dyn. C        |
| C <sub>0</sub>     | 2.450 N    | Load capacity stat. C0      |
| m                  | 0,745 kg   | Masa                        |



### Mounting dimensions

|                    |            |                    |
|--------------------|------------|--------------------|
| J <sub>B</sub>     | 45 mm      |                    |
| Tol J <sub>B</sub> | + 0,15 mm  | Upper tolerance    |
| Tol J <sub>B</sub> | - 0,15 mm  | Lower tolerance    |
| A <sub>5</sub>     | 30 mm      | Mounting Dimension |
| B <sub>1</sub>     | 44 mm      |                    |
| J <sub>L</sub>     | 55 mm      |                    |
| Tol J <sub>L</sub> | + 0,15 mm  | Upper tolerance    |
| Tol J <sub>L</sub> | - 0,15 mm  | Lower tolerance    |
| H <sub>2</sub>     | 25 mm      | Center height      |
| Tol H <sub>2</sub> | + 0,015 mm | Upper tolerance    |
| Tol H <sub>2</sub> | - 0,015 mm | Lower tolerance    |
| H <sub>4</sub>     | 33 mm      |                    |
| A <sub>3</sub>     | 13 mm      |                    |
| H <sub>5</sub>     | 7,4 mm     |                    |
| T <sub>5</sub>     | 18 mm      |                    |
| H <sub>6</sub>     | 37 mm      |                    |
| N <sub>1</sub>     | 6,4 mm     |                    |
| N <sub>3</sub>     | 11 mm      |                    |
| G <sub>2</sub>     | M8         | Thread size        |
| K <sub>8</sub>     | NIPA2      | Lubrication nipple |
| K <sub>5</sub>     | M6         | Screw ISO 4762     |