


KTB25-B-PP-AS

Linear Ball Bearing and Housing Unit

Linear ball bearing and housing unit; sealed, greased, with relubrication facility; corrosion-resistant design possible

Informacje techniczne

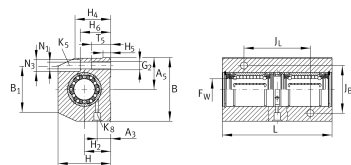

Twoja aktualna wersja produktu

Size	25
Seal	PP
Relubrication feature	AS

Main Dimensions & Performance Data

F _W	25 mm	Diameter of ball complement
Tol F _W	+ 0,011 mm	Upper tolerance
Tol F _W	- 0,001 mm	Lower tolerance
H	60 mm	Height
L	130 mm	Length
B	78 mm	Width
C	4.550 N	Load capacity dyn. C
C ₀	4.450 N	Load capacity stat. C0
m	1,47 kg	Masa



Mounting dimensions

J _B	54 mm	
Tol J _B	+ 0,15 mm	Upper tolerance
Tol J _B	- 0,15 mm	Lower tolerance
A ₅	39 mm	Mounting Dimension
B ₁	60 mm	
J _L	70 mm	
Tol J _L	+ 0,15 mm	Upper tolerance
Tol J _L	- 0,15 mm	Lower tolerance
H ₂	30 mm	Center height
Tol H ₂	+ 0,015 mm	Upper tolerance
Tol H ₂	- 0,015 mm	Lower tolerance
H ₄	40 mm	
A ₃	15 mm	
H ₅	8,3 mm	
T ₅	22 mm	
H ₆	49 mm	
N ₁	8,4 mm	
N ₃	15 mm	
G ₂	M10	Thread size
K ₈	NIPA2	Lubrication nipple
K ₅	M8	Screw ISO 4762