


KTB30-B-PP-AS

Linear Ball Bearing and Housing Unit

Linear ball bearing and housing unit; sealed, greased, with relubrication facility; corrosion-resistant design possible

Informacje techniczne

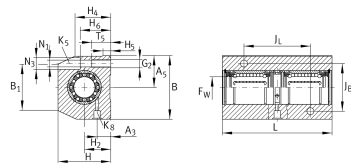

Twoja aktualna wersja produktu

Size	30
Seal	PP
Relubrication feature	AS

Main Dimensions & Performance Data

F _W	30 mm	Diameter of ball complement
Tol F _W	+ 0,011 mm	Upper tolerance
Tol F _W	- 0,001 mm	Lower tolerance
H	70 mm	Height
L	152 mm	Length
B	87 mm	Width
C	5.900 N	Load capacity dyn. C
C ₀	5.700 N	Load capacity stat. C0
m	2,235 kg	Masa



Mounting dimensions

J _B	62 mm	
Tol J _B	+ 0,15 mm	Upper tolerance
Tol J _B	- 0,15 mm	Lower tolerance
A ₅	43,5 mm	Mounting Dimension
B ₁	63 mm	
J _L	85 mm	
Tol J _L	+ 0,15 mm	Upper tolerance
Tol J _L	- 0,15 mm	Lower tolerance
H ₂	35 mm	Center height
Tol H ₂	+ 0,015 mm	Upper tolerance
Tol H ₂	- 0,015 mm	Lower tolerance
H ₄	44,5 mm	
A ₃	16 mm	
H ₅	9,3 mm	
T ₅	26 mm	
H ₆	52 mm	
N ₁	10,5 mm	
N ₃	18 mm	
G ₂	M12	Thread size
K ₈	NIPA2	Lubrication nipple
K ₅	M10	Screw ISO 4762