


**KWEM12-E-V0-G2**

Miniature Carriage, Standard for Miniature-Guideway, Standard

Miniature Carriage, Standard; for Miniature-Guideway, Standard

Informacje techniczne

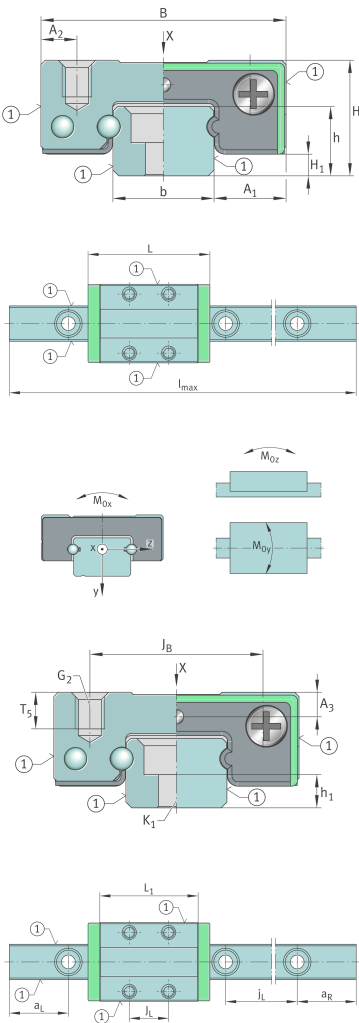

Twoja aktualna wersja produktu

|                 |    |                  |
|-----------------|----|------------------|
| Size            | 12 |                  |
| Version         | E  |                  |
| Carriage design | /  | Standard Design  |
| Preload class   | V0 | Slight clearance |
| Accuracy class  | G2 |                  |

Main Dimensions & Performance Data

|                 |         |                                   |
|-----------------|---------|-----------------------------------|
| H               | 13 mm   | Height system                     |
| B               | 27 mm   | Width carriage                    |
| L               | 35 mm   | Length of carriage                |
| C               | 2.500 N | Dynamic load rating               |
| C <sub>0</sub>  | 3.900 N | Basic static load capacity        |
| M <sub>0x</sub> | 21,5 Nm | Static moment rating about X axis |
| M <sub>0y</sub> | 11,7 Nm | Static moment rating about Y axis |
| M <sub>0z</sub> | 11,7 Nm | Static moment rating about Z axis |
| ≈m              | 41 g    | Masa                              |



Mounting dimensions

|        |         |                                                                      |
|--------|---------|----------------------------------------------------------------------|
| b      | 12 mm   | Width rail                                                           |
| A 1    | 7,5 mm  | Distance from locating edge on carriage to locating edge on guideway |
| A 2    | 3,5 mm  | Distance from locating edge to hole                                  |
| H 1    | 3,35 mm | Free space, system dimension                                         |
| J B    | 20 mm   | Hole spacing                                                         |
| J L    | 15 mm   | Hole Spacing                                                         |
| T 5    | 3,5 mm  | Thread depth                                                         |
| A 3    | 2,65 mm | Position lubrication connector                                       |
| G2     | M3      | Thread size                                                          |
| G2 M A | 1,1 Nm  | Maximum tightening torque                                            |

Additional information

|          |      |               |
|----------|------|---------------|
| VMKB_065 | KWEM | Material name |
|----------|------|---------------|