
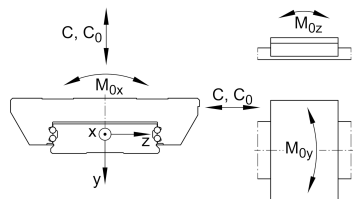
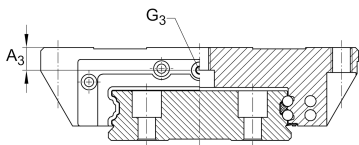
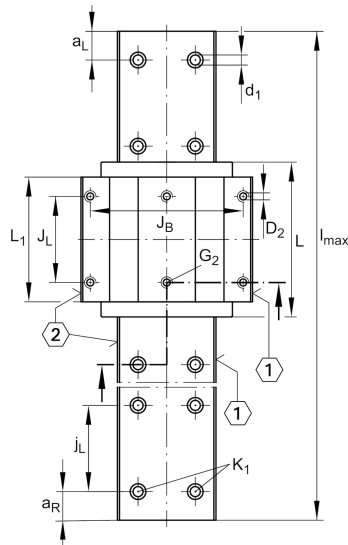


KWVE15-W-V2-G3

Recirculating ball bearing carriage

Carriages KWVE...-W, wide carriage for linear recirculating ball bearing and guideway assembly

Informacje techniczne

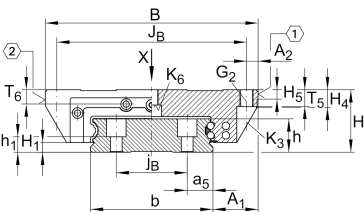


Twoja aktualna wersja produktu

Size code	15
Version	Version
Carriage design	przypadku jakichkolwiek pytań prosimy o bezpośredni kontakt z partnerem handlowym. Wide carriage and wide guideway
Preload	V2 Preload class 2
Accuracy class	G3

Main Dimensions & Performance Data

H	21 mm	Height system
B	68 mm	Width carriage
L	55,6 mm	Overall length carriage
C	7.200 N	Dynamic load rating
C ₀	14.500 N	Static load rating
M _{0x}	332 Nm	Static moment rating about X axis
M _{0y}	100 Nm	Static moment rating about Y axis
M _{0z}	100 Nm	Static moment rating about Z axis
≈m	0,26 kg	Masa



Mounting dimensions

A 1	15,5 mm	Distance from locating edge on carriage to locating edge on guideway
J B	60 mm	
b	37 mm	Width rail
A 2	4 mm	Distance from locating edge to hole
L 1	39,8 mm	
J L	29 mm	
H 1	2,1 mm	Free space, system dimension
H 4	7,7 mm	
H 5	4,5 mm	
T 5	7 mm	Thread depth
T 6	4,8 mm	
G 2	M5	Fixing screws above (DIN ISO 4762-12.9)
G2 M A	5,8 Nm	Maximum tightening torque
K 3	M4	Fixing screws below (DIN ISO 4762-12.9)
K3 M A	5 Nm	Maximum tightening torque
K 6	M4	Fixing screws below (DIN 7984-8.8)
K6 M A	2 Nm	Maximum tightening torque
D 2	4,5 mm	
A 3	3,6 mm	Position lubrication connector
G 3	M3	Lubrication connector
t G 3	4 mm	Maximum permissible screw depth for lubrication connectors

Additional information

VMKB_065	KWVE	Material name
----------	------	---------------