
**LTCD20D-2LS**

Linear ball bearing and housing unit

Tandem unit, heavy duty range, self-aligning, seals on both sides

## Informacje techniczne

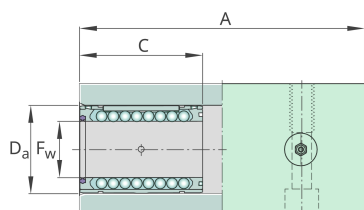

## Twoja aktualna wersja produktu



|                 |    |
|-----------------|----|
| Size            | 20 |
| Number of seals | 2  |

## Technical data

|           |                      |                      |
|-----------|----------------------|----------------------|
| $v_{max}$ | 5 m/s                | Maximum Speed        |
| $a_{max}$ | 100 m/s <sup>2</sup> | Maximum Acceleration |
| $m$       | 0,696 kg             | Masa                 |

## Mounting dimensions

|                |        |               |
|----------------|--------|---------------|
| H              | 25 mm  | Center height |
| J <sub>1</sub> | 55 mm  |               |
| J              | 45 mm  |               |
| N <sub>1</sub> | M8     | Thread        |
| L              | 60 mm  |               |
| A              | 104 mm | Length        |

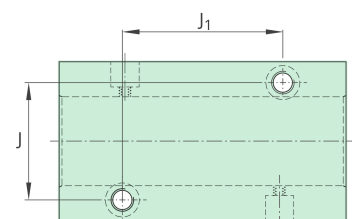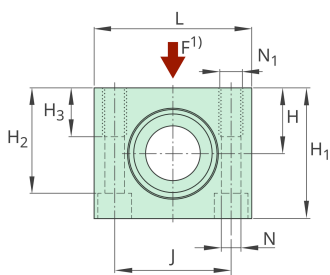



Main Dimensions & Performance Data

|         |         |                     |
|---------|---------|---------------------|
| N       | 6,4 mm  | Bore diameter       |
| H 2     | 39,5 mm | Height              |
| D a     | 32 mm   | Bore diameter       |
| F W     | 20 mm   | Bore diameter       |
| C       | 45 mm   | Length              |
| C max   | 4.150 N | Load capacity dyn.  |
| C min   | 2.800 N | Load capacity dyn.  |
| C 0 min | 2.240 N | Load capacity stat. |
| C 0 max | 3.600 N | Load capacity stat. |

Dimensions

|     |         |        |
|-----|---------|--------|
| H 1 | 49,5 mm | Height |
| H 3 | 18 mm   | Height |