
**LTCR16D-2LS** [🔗](#)

Linear ball bearing and housing unit

Tandem unit, heavy duty range, seals on both sides

Informacje techniczne

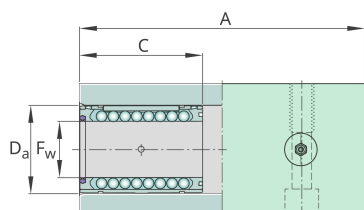

Twoja aktualna wersja produktu



Size	16
Number of seals	2

Technical data

v_{max}	5 m/s	Maximum Speed
a_{max}	100 m/s ²	Maximum Acceleration
m	387 g	Masa

Mounting dimensions

H	22 mm	Center height
J ₁	45 mm	
J	36 mm	
N ₁	M6	Thread
L	50 mm	
A	84 mm	Length

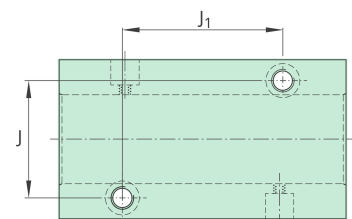



Main Dimensions & Performance Data

N	5,3 mm	Bore diameter
H 2	33 mm	Height
D a	26 mm	Bore diameter
F W	16 mm	Bore diameter
C	36 mm	Length
C max	2.600 N	Load capacity dyn.
C min	1.760 N	Load capacity dyn.
C 0 min	1.600 N	Load capacity stat.
C 0 max	2.600 N	Load capacity stat.

Dimensions

H 1	41,5 mm	Height
H 3	13 mm	Height